

## Commission of Architectural Review Certificate of Appropriateness Application

900 E. Broad Street, Room 510 Richmond, VA 23219 804-646-6569

Property Address: 2214 E Marshall St		Current Zoning: R-8
Historic District: Church Hill		
Application is submitted for: (check one)		
■ Alteration		
☐ Demolition		
□ New Construction		
Project Description (attach additional sheets if needed)	):	
Our home is south-facing on a hill with no coverage the sun's heat will not bake our home. My understand heat before it's able to penetrate our house. We would	ding of the exterior shades	is that it will reflect/absorb the
Applicant/Contact Person: Bobbi Rodriguez		
Company:		
Mailing Address: 2214 E Marshall St		
City: Richmond Telephone: (773 ) 757-7725	State: VA	Zip Code: 23223
Email: bobbijeanrodriguez@gmail.com		
Billing Contact? Yes Applicant Type (owner, archite	tect, etc.): Owner	
20 0000 00		
If Business Entity, name and title of authorized signee:		
Mailing Address:	Ct-t	7:- C-4
City:		Zip Code:
Telephone: ()		
Billing Contact?		
**Owner must sign at the bottom of this page**		
Acknowledgement of Responsibility		
Compliance: If granted, you agree to comply with all con	ditions of the certificate of a	ppropriateness (COA) Revisions to
approved work require staff review and may require a ne		
Review (CAR). Failure to comply with the conditions of t		
for one (1) year and may be extended for an additional y		
		M. 4.11 11 11 11 11 11 11 11 11 11 11 11 11
Requirements: A complete application includes all application provide a complete and accurate description of existin Applications proposing major new construction, includin requirements prior to submitting. Owner contact information be considered.	g and proposed conditions, g additions, should meet wit	as well as payments of the application fee th staff to review the application and
Zoning Requirements: Prior to Commission review, it is required. Application materials should be prepared in commission.		licant to determine if zoning approval is
Property Owner Signature: Bobbi Rodrige	127	Date: 2/12/2024

Our home is south-facing on a hill with no coverage from the sun. We would like to install exterior shades so that the sun's heat will not bake our home. My understanding of the exterior shades is that it will reflect/absorb the heat before it's able to penetrate our house. We would like to shade the three south-facing windows that we have on our second floor. There are many colors that the shades come in, including white to match the trim.



# **Outdoor Solar Shades**

Brand: Bali

\*\*\* 166 Reviews | 121 Questions, 175 Answers

50% OFF WITH CODE "SWEET" ENDS 2/13

Create some shade and cool off your patio with Outdoor Solar Shades by Bali, designed to lower your air conditioning bills by blocking damaging UV radiation and reducing solar heat gain. Read More.

\$134.99

Muse 1% Formal 47612


Order Sample

- SureFit™ Guaranteed to Fit!
- Measure Instructions and Specifications
- Estimated Ship Date: 02/22/2024



Pay in 4 interest-free payments of \$16.88. Learn more



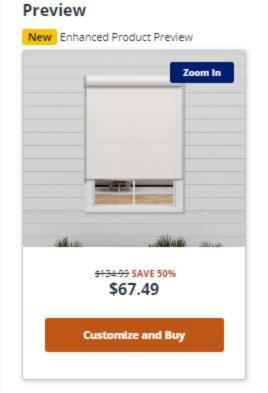

## Color

#### 1% Openness



Feedback 1% Shiny
Muse 1% Alaska Sky
Muse 1% Irish
Oatmeal 47607

Order Sample
Order Sample
Order Sample

#### 3% Openness



4% Openness

## **Product Details**

## Description

Create some shade and cool off your patio with the Outdoor Solar Shades by Bali, designed to lower your air conditioning bills by blocking damaging UV radiation and reducing solar heat gain. Select your desired privacy level with 1-14% open weaves (lower openness percentages represent higher privacy and light blockage).

Includes a beaded chain continuous cord loop that makes it easy to raise and lower wide and heavy shades, along with an optional powder-coated aluminum curved cassette valance for a smooth and protected finish. Greenguard Certified for low chemical emissions, these shades are safe for use in your home, rust-proof, easy to clean and will last for years.

Install Time: 20-25 minutes

## We Recommend:

- For obstructions in the window, consider the free-reverse roll option to ensure smooth operation (not available with ① cassette valance).
- Choose from a number of neutral tones to blend with your home's exterior.
- · Click here to see other products that are available in many of the same materials.

## **Child Safety Information:**

This product has accessible cords and is not recommended for windows where children or pets may be present.

# Warranty:

In addition to Bali's manufacturer warranty, the assurance of the Blinds.com Warranty means you can trust that this product will last and provide added value and beauty to your home.



# Surefit™ Guarantee

With SureFit<sup>™</sup>, a Blinds.com exclusive, we make sure you have complete peace measuring for any product we offer. If you made a mistake measuring your blind, we'll remake it at no cost to you. \* You don't even pay for the return shipping of your old blind!

\*You only pay if there's a price difference between your old and new blind, or if the new blind requires a shipping fee (generally, this applies when it's over 94" wide).

## Important Disclaimer:

- Limit 1 remake per item; 4 item remakes per household per lifetime (unless the
  error is ours, in which case, we'll make it right!).
- Same-product exchanges only, within 30 calendar days of receipt of package.
- · Changes are restricted to size and mount only.
- · Refunds are not offered under this guarantee.

## Not Covered Under This Guarantee:

- Commercial orders: any order containing 25 or more of the same product, of tax exempt status, or containing any Blinds.com Commercial brand product.
- Any product ordered outside our recommended sizes or specifications, which can be found on the product page.

# **Product Specifications**

Standard Blind Specifications Minimum Width: 24"	Mounting Requirements  Minimum Inside Mount Depth (No	Optional Upgrades	Quick Links Measure Instructions
Maximum Width: 144"  Minimum Height: 36"	Valance): 3/4" Fully Recessed Inside Mount Depth (No Valance): 4 1/8"		Install Instructions  Care and Warranty
Maximum Height: 144"  Light Gap Per Side (Continuous Cord Loop No Cassette): 9/16"- 13/16"  Light Gap Per Side (Continuous Cord	Minimum Inside Mount Depth (Medium or Large Cassette Valance): 1 3/4" Fully Recessed Inside Mount Depth (Medium or Large Cassette Valance): 4		Child Safety  Origin of Production  Imported
Loop With Cassette): 9/16"- 1 1/16"  Headrail Color-Coordinated to Fabric	1/2 - 5 1/2"  Approximate Outside Mounting Surface (No Valance): 1 3/4"  Minimum Inside/ Top Mount (No Valance): 4 1/8"		