



Commission for Architectural Review Application for Certificate of Appropriateness

900 E. Broad Street, Room 510
Richmond, VA 23219 | (804)-646-6569
www.rva.gov/planning-development-review/commission-architectural-review



Property (location of work)

Address: 2818 Monument Avenue

Historic District: _____

Applicant Information Billing Contact

Name: Siwel Renovations LLC

Email: siwelholdingsllc@gmail.com

Phone: 804-513-6000

Company: Siwel Holdings LLC

Mailing Address: PO Box 8301

Richmond VA 23226

Applicant Type: Owner Agent Lessee

Architect Contractor

Other (specify): _____

Owner Information Billing Contact

Same as Applicant

Name: Siwel Renovations LLC

Email: siwelholdingsllc@gmail.com

Phone: 804-513-6000

Company: Siwel Holdings LLC

Mailing Address: PO Box 8301

Richmond VA 23226

****Owner must sign at the bottom of this page****

Project Information

Project Type: Alteration Demolition New Construction (Conceptual Review Required)


Project Description (attach additional sheets if needed):

Acknowledgement of Responsibility

Compliance: If granted, you agree to comply with all conditions of the certificate of appropriateness (COA). Revisions to approved work require staff review and may require a new application and approval from the Commission of Architectural Review (CAR). Failure to comply with the conditions of the COA may result in project delays or legal action. The COA is valid for one (1) year and may be extended for an additional year, upon written request and payment of associated fee.

Requirements: A complete application includes all applicable information requested on checklists available on the CAR website to provide a complete and accurate description of existing and proposed conditions, as well as payments of the application fee. Applications proposing major new construction, including additions, should meet with staff to review the application and requirements prior to submitting an application. Owner contact information and signature is required. Late or incomplete applications will not be considered.

Zoning Requirements: Prior to Commission review, it is the responsibility of the applicant to determine if zoning approval is required an application materials should be prepared in compliance with zoning.

Signature of Owner 

Date 01/09/23

Certificate of Appropriateness Application Instructions

In advance of the application deadline, please contact staff to discuss your project, application requirements, and if necessary, to make an appointment to meet with staff for a project consultation. The CAR website has additional project guidance and required checklists: www.rva.gov/planning-development-review/commission-architectural-review

Staff Contact: (804)-646-6569 | alex.dandrige@rva.gov | alyson.oliver@rva.gov

Submission Instructions

Certain exterior work can be administratively approved by Staff. Please contact staff via email with the project address in the subject line. Submit the following items via email to staff:

- One (1) signed and completed application (PDF) - property owner's signature required
- One (1) copy of supporting documentation, as indicated on appropriate checklist (PDF)
- Application fee, if required, will be invoiced via the City's Online Permit Portal. Payment of the fee must be received before the application will be scheduled. Please see fee schedule brochure available on the CAR website for additional information.
- **Application deadlines are firm.** All materials must be submitted by the deadline to be considered at the following Commission meeting. Designs must be final at the time of application; revisions will not be accepted after the deadline. Incomplete and/or late applications will not be placed on that month's agenda.
- A complete application includes a signed application form, related checklist, legible plans, drawings, elevations, material specifications, and payment of the required fee as described in Sec. 30-930.6(b).
- The Commission will not accept new materials, revisions, or redesigns at the meeting. Deferral until the following month's meeting may be necessary in such cases to allow for adequate review by staff, Commissioners, and public notice, if required.

Meeting Schedule and Application Due Dates

- The CAR meets on the fourth Tuesday of each month, except for December when it meets on the third Tuesday.
- The hearing of applications starts at 4:00pm via Microsoft Teams. The owner and/or applicant is encouraged to attend the meeting.
- All applications are due at 12 noon the Friday after the monthly CAR meeting, except in December, when applications are due the following Monday. For a list of meeting dates and submission deadline dates for each meeting please visit www.rva.gov/planning-development-review/commission-architectural-review or contact staff.
- Exception: Revisions to applications that have been deferred or conceptually reviewed at a CAR meeting can be submitted nine (9) business days after that meeting in order to be reviewed at the following meeting. Please contact staff to confirm this date.

Fees

- **Full Demolition:** \$1,500
- **New construction/addition to a building other than for a single- or two-family dwelling or accessory building, including multi-family or mixed-use developments:** \$500
- **New construction/addition to a single- or two-family dwelling, or accessory building:** \$250
- **Amendments to previous certificates of appropriateness (COAs) concerning non-structural alterations, changes to signage, and changes to plans:** \$150
- **Extension of a certificate of appropriateness (COA):** \$25


APARTMENT PROJECT 2818 MONUMENT AVENUE RICHMOND, VIRGINIA

CODE NOTES

- VCC 2018
- USE GROUP R-2
- USE NO. 2 GRADE FRAMING MATERIAL
- HEADER'S (2) 2X8'S UNLESS NOTED OTHERWISE
- SHEATHING 5/8" DENSGLASS RATED EXTERIOR WITH BRICK VENEER
- BRACED WALL CONTINUOUS SHEATHING
- INSULATE WALLS WITH R-20, ATTIC/ROOF AREAS R38 BATT SLAB R-10 PERIMETER
- FINISH WITH 5/8" GYPSUM BOARD AND PAINT.
- ASSUMED SOIL BEARING CAPACITY 2000 PSF
- CONCRETE 3000 PSI FOOTINGS, 4500 PSI SLAB
- LOADS: FLOOR - LIVE 40 PSF, DEAD 10 PSF
ROOF - LIVE 20 PSF, DEAD 10 PSF
- WIND SPEED 115 MPH
- SIMPSON CONNECTORS AS REQUIRED


AREA SQUARE FEET

FIRST FLOOR	2768 SQ.FT.
BASEMENT FLOOR	2768 SQ.FT.
SECOND FLOOR	2747 SQ.FT.
THIRD FLOOR	2747 SQ.FT.
8 PORCHES	1024 SQ.FT.
TOTAL BUILDING	12054 SQ.FT.

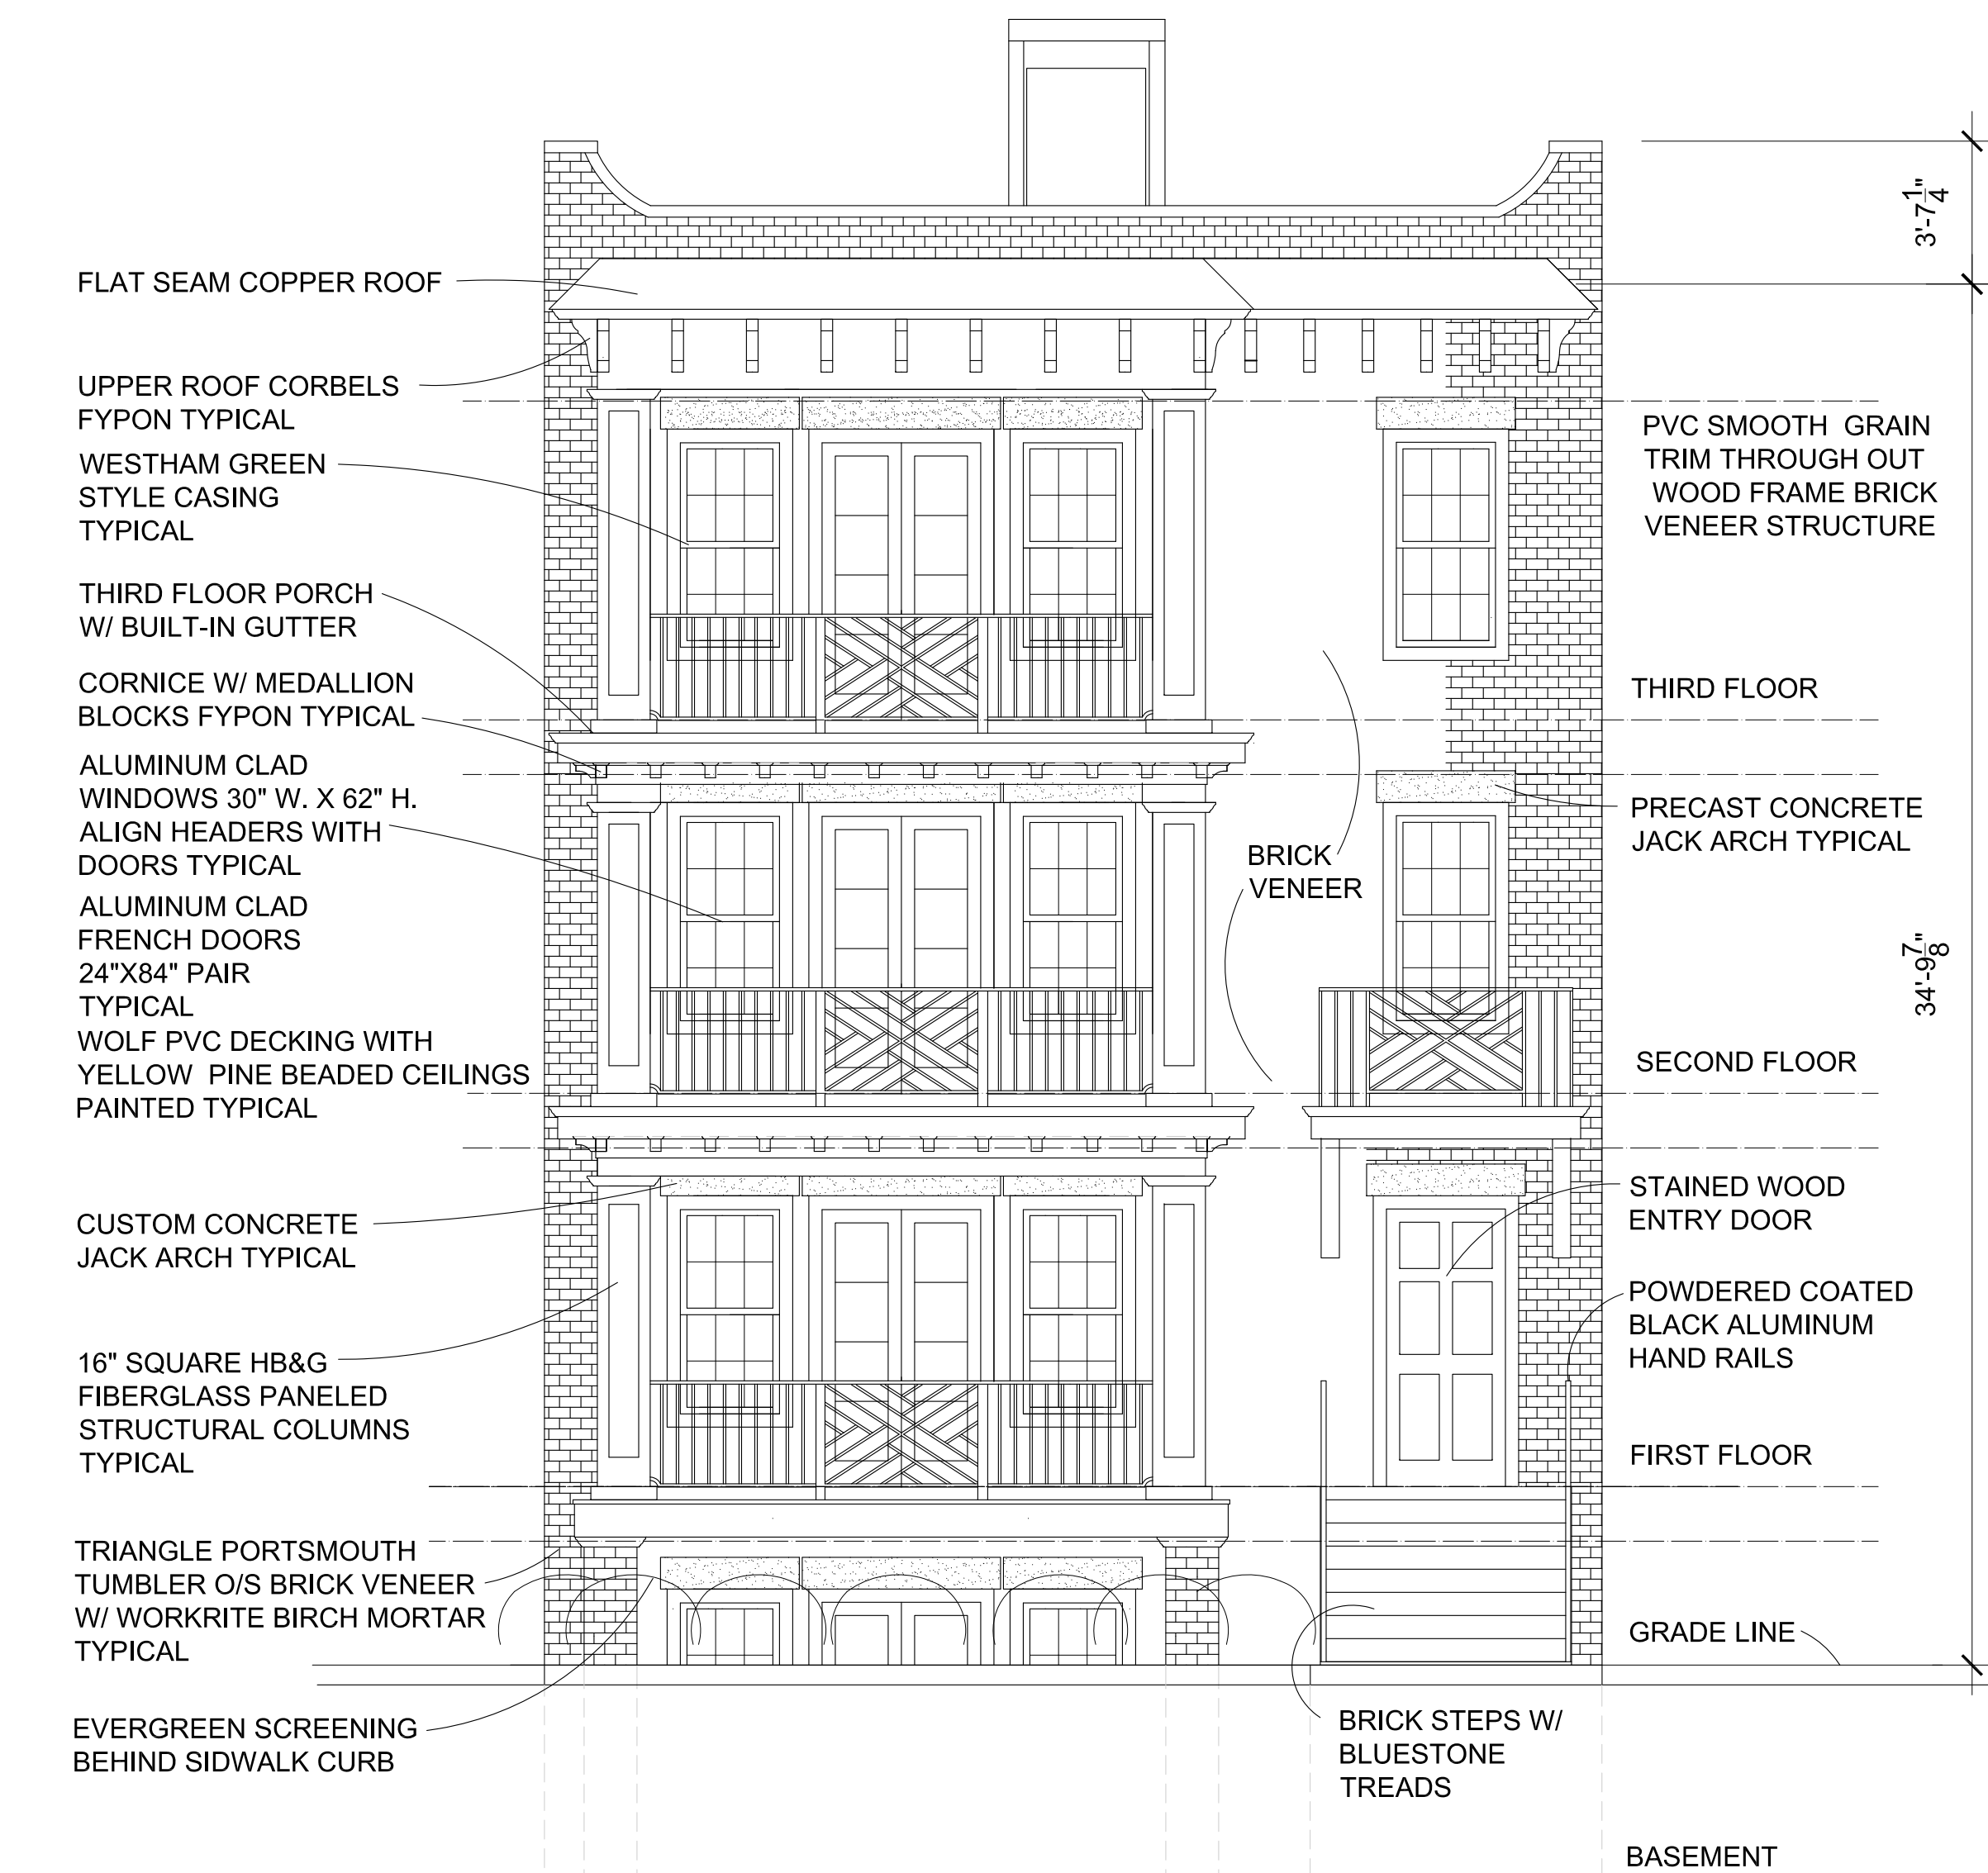

SOUTH ELEVATION



SCALE: 1/4" = 1'-0"

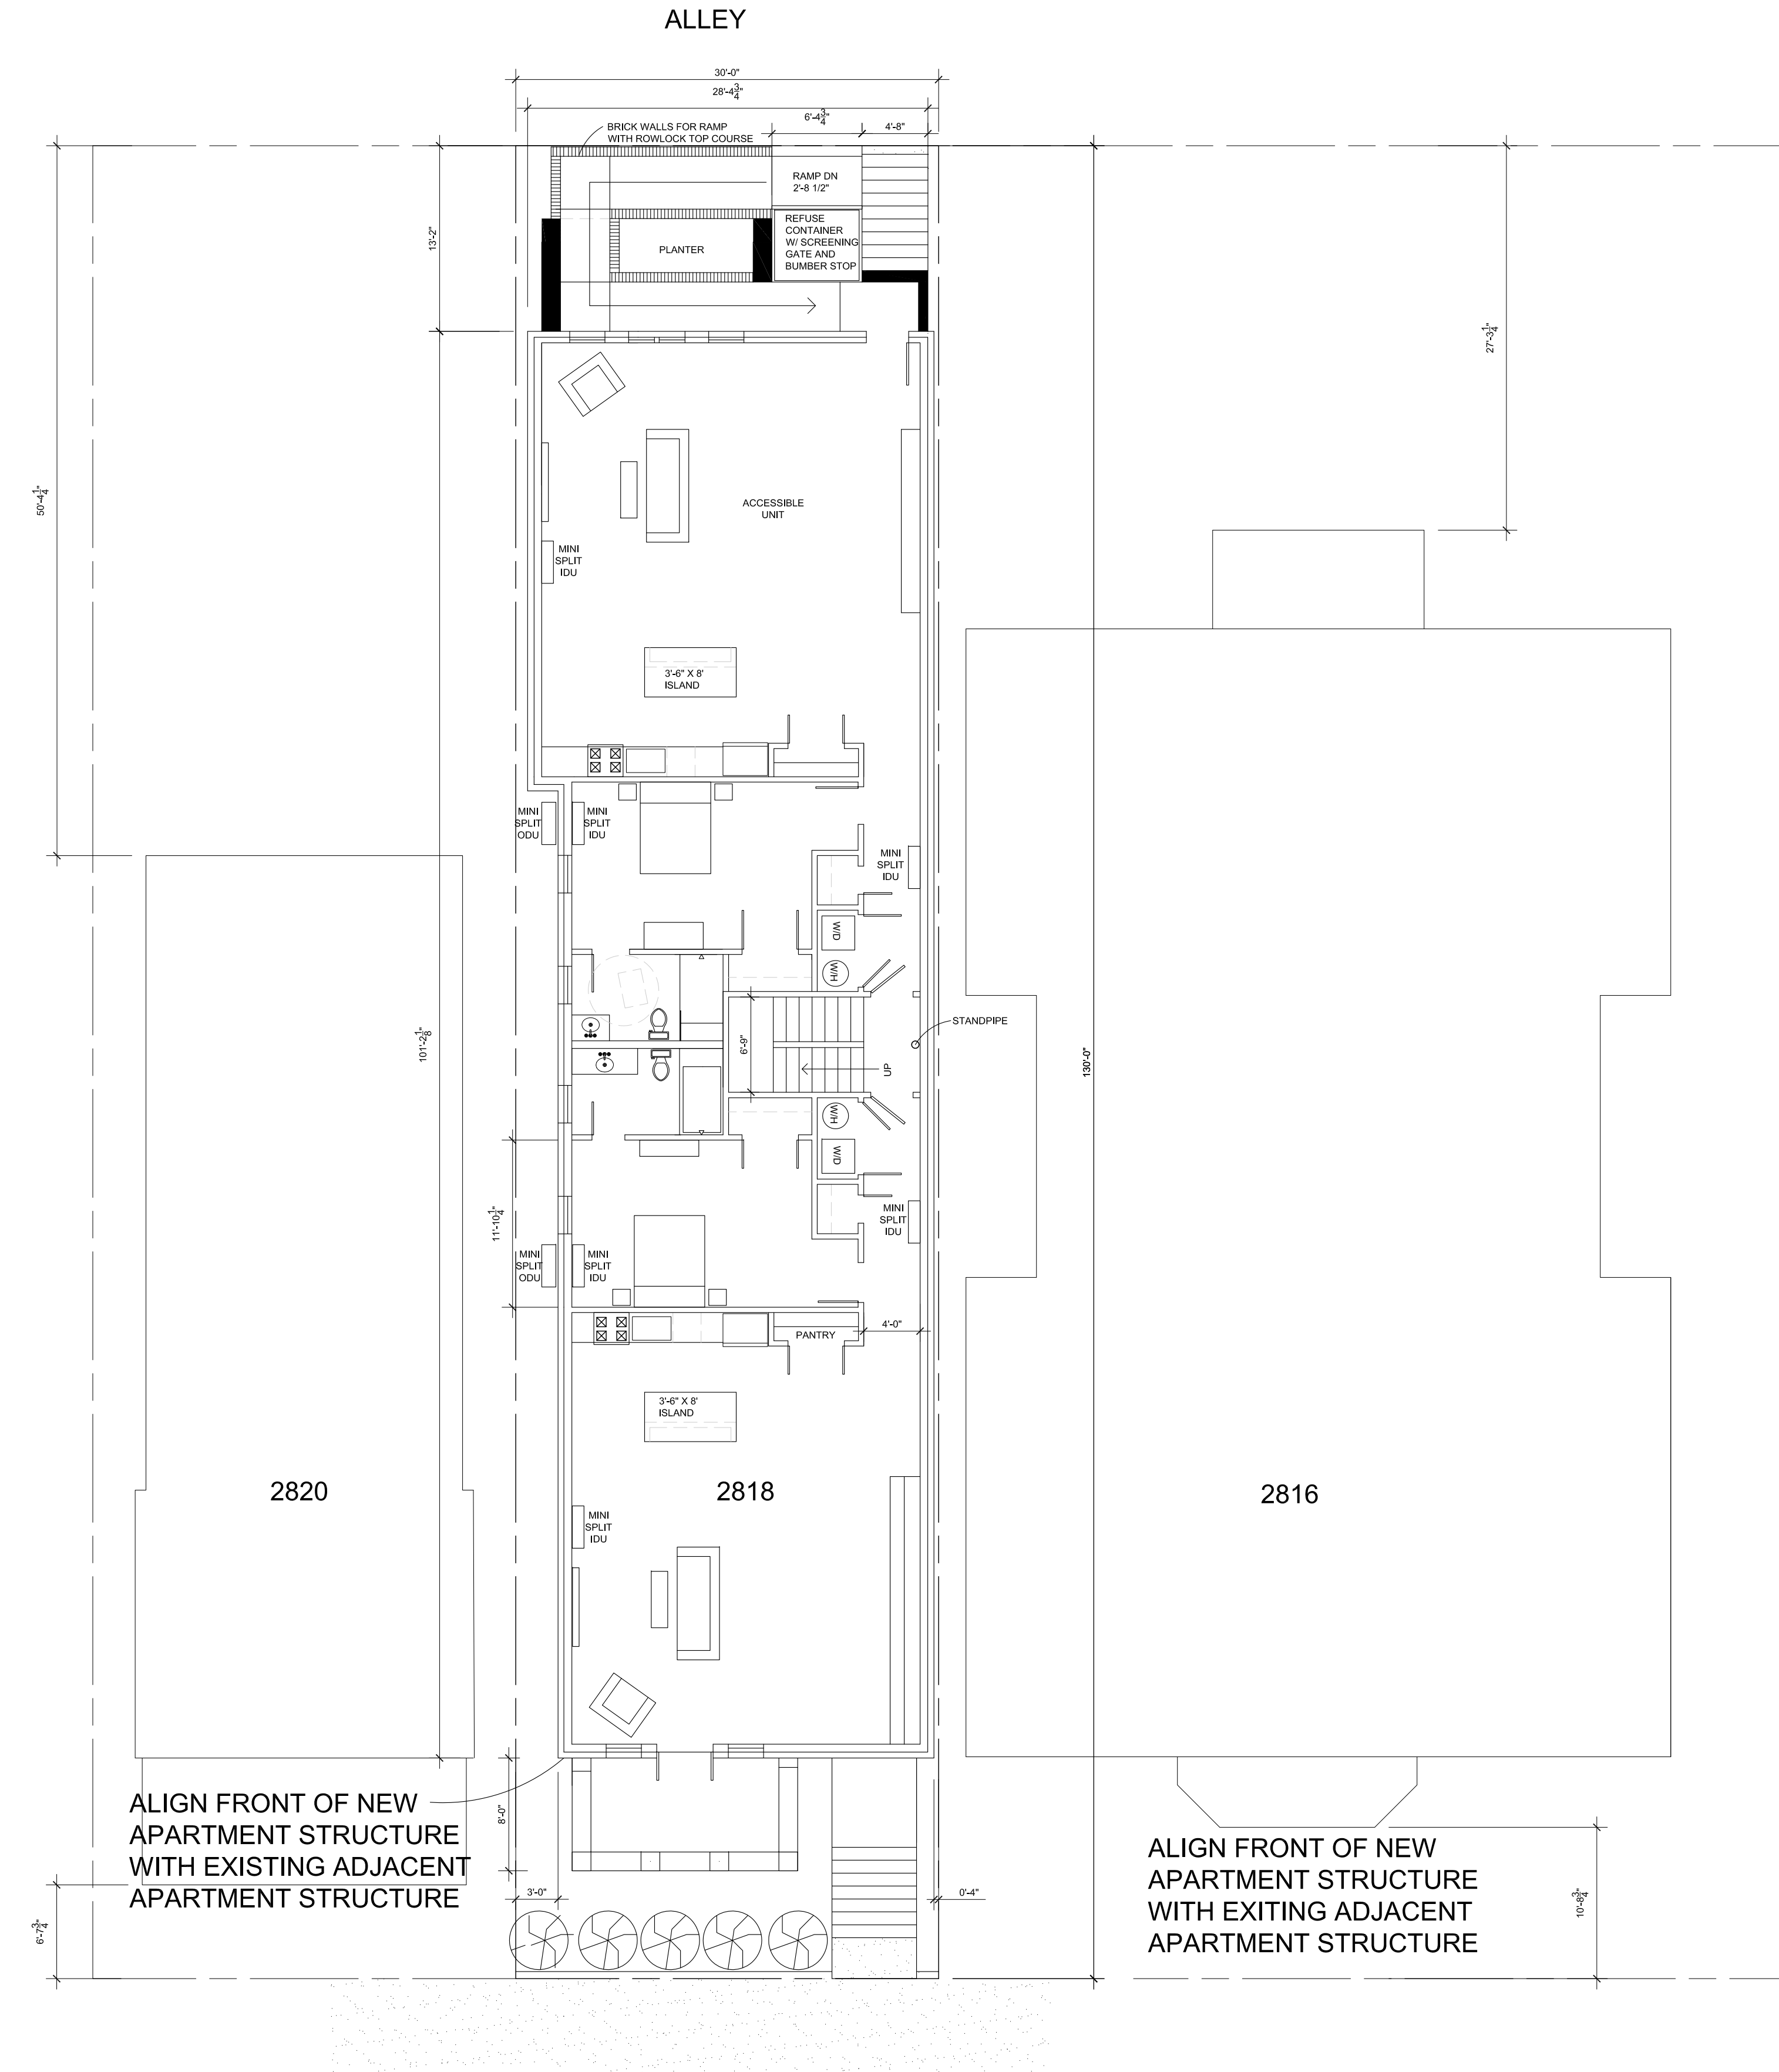

MONUMENT AVENUE

SITE PLAN

SCALE: 1/16" = 1'-0"

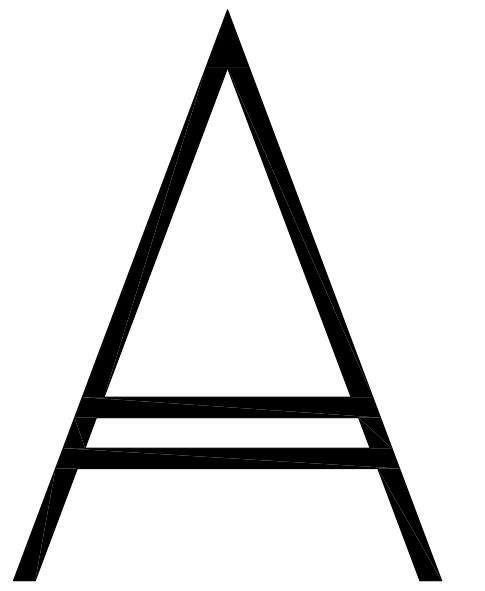

APPICH

ARCHITECTS
appicharchitects.com
14321 Winter Ridge Lane
Midlothian, VA 23113
p 804.379.8606
f 804.379.7470
m 804.399.7217


residential commercial reconstruction

APARTMENT PROJECT
2818 MONUMENT AVENUE
RICHMOND, VIRGINIA

PROJECT NUMBER: 2022-32
DATE: DECEMBER 26, 2019
DRAWN BY: CWA
REV 2-10-22
REV 5-27-22
REV 8-4-22
REV 8-24-22
REV 8-25-22
REV 10-24-22
REV 11-18-22
REV 11-23-22
REV 1-5-23

A-1

COVER SHEET
SITE PLAN

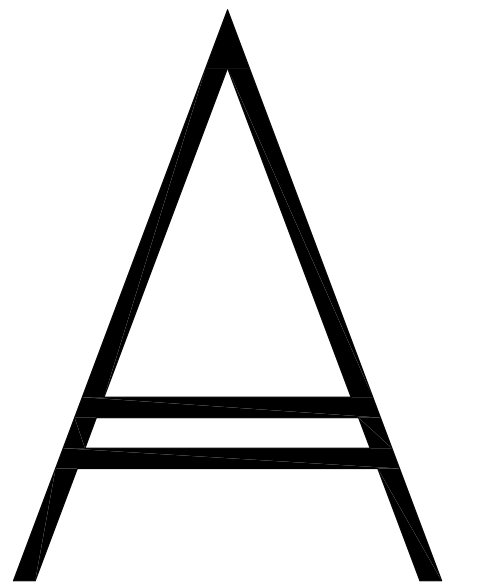

APPICH
ARCHITECTS


appicharchitects.com
14321 Winter Ridge Lane
Midlothian, VA 23113
p 804.379.8606
f 804.379.7470
m 804.399.7217

residential commercial reconstruction



APARTMENT PROJECT
2818 MONUMENT AVENUE
RICHMOND, VIRGINIA

PROJECT NUMBER: 2022-17
DATE: February 8, 2022
DRAWN BY: CWA
REV 5-27-22
REV 8-24-22
REV 8-25-22
REV 10-24-22
REV 11-18-22
REV 1-5-23



A-2
FLOOR PLANS

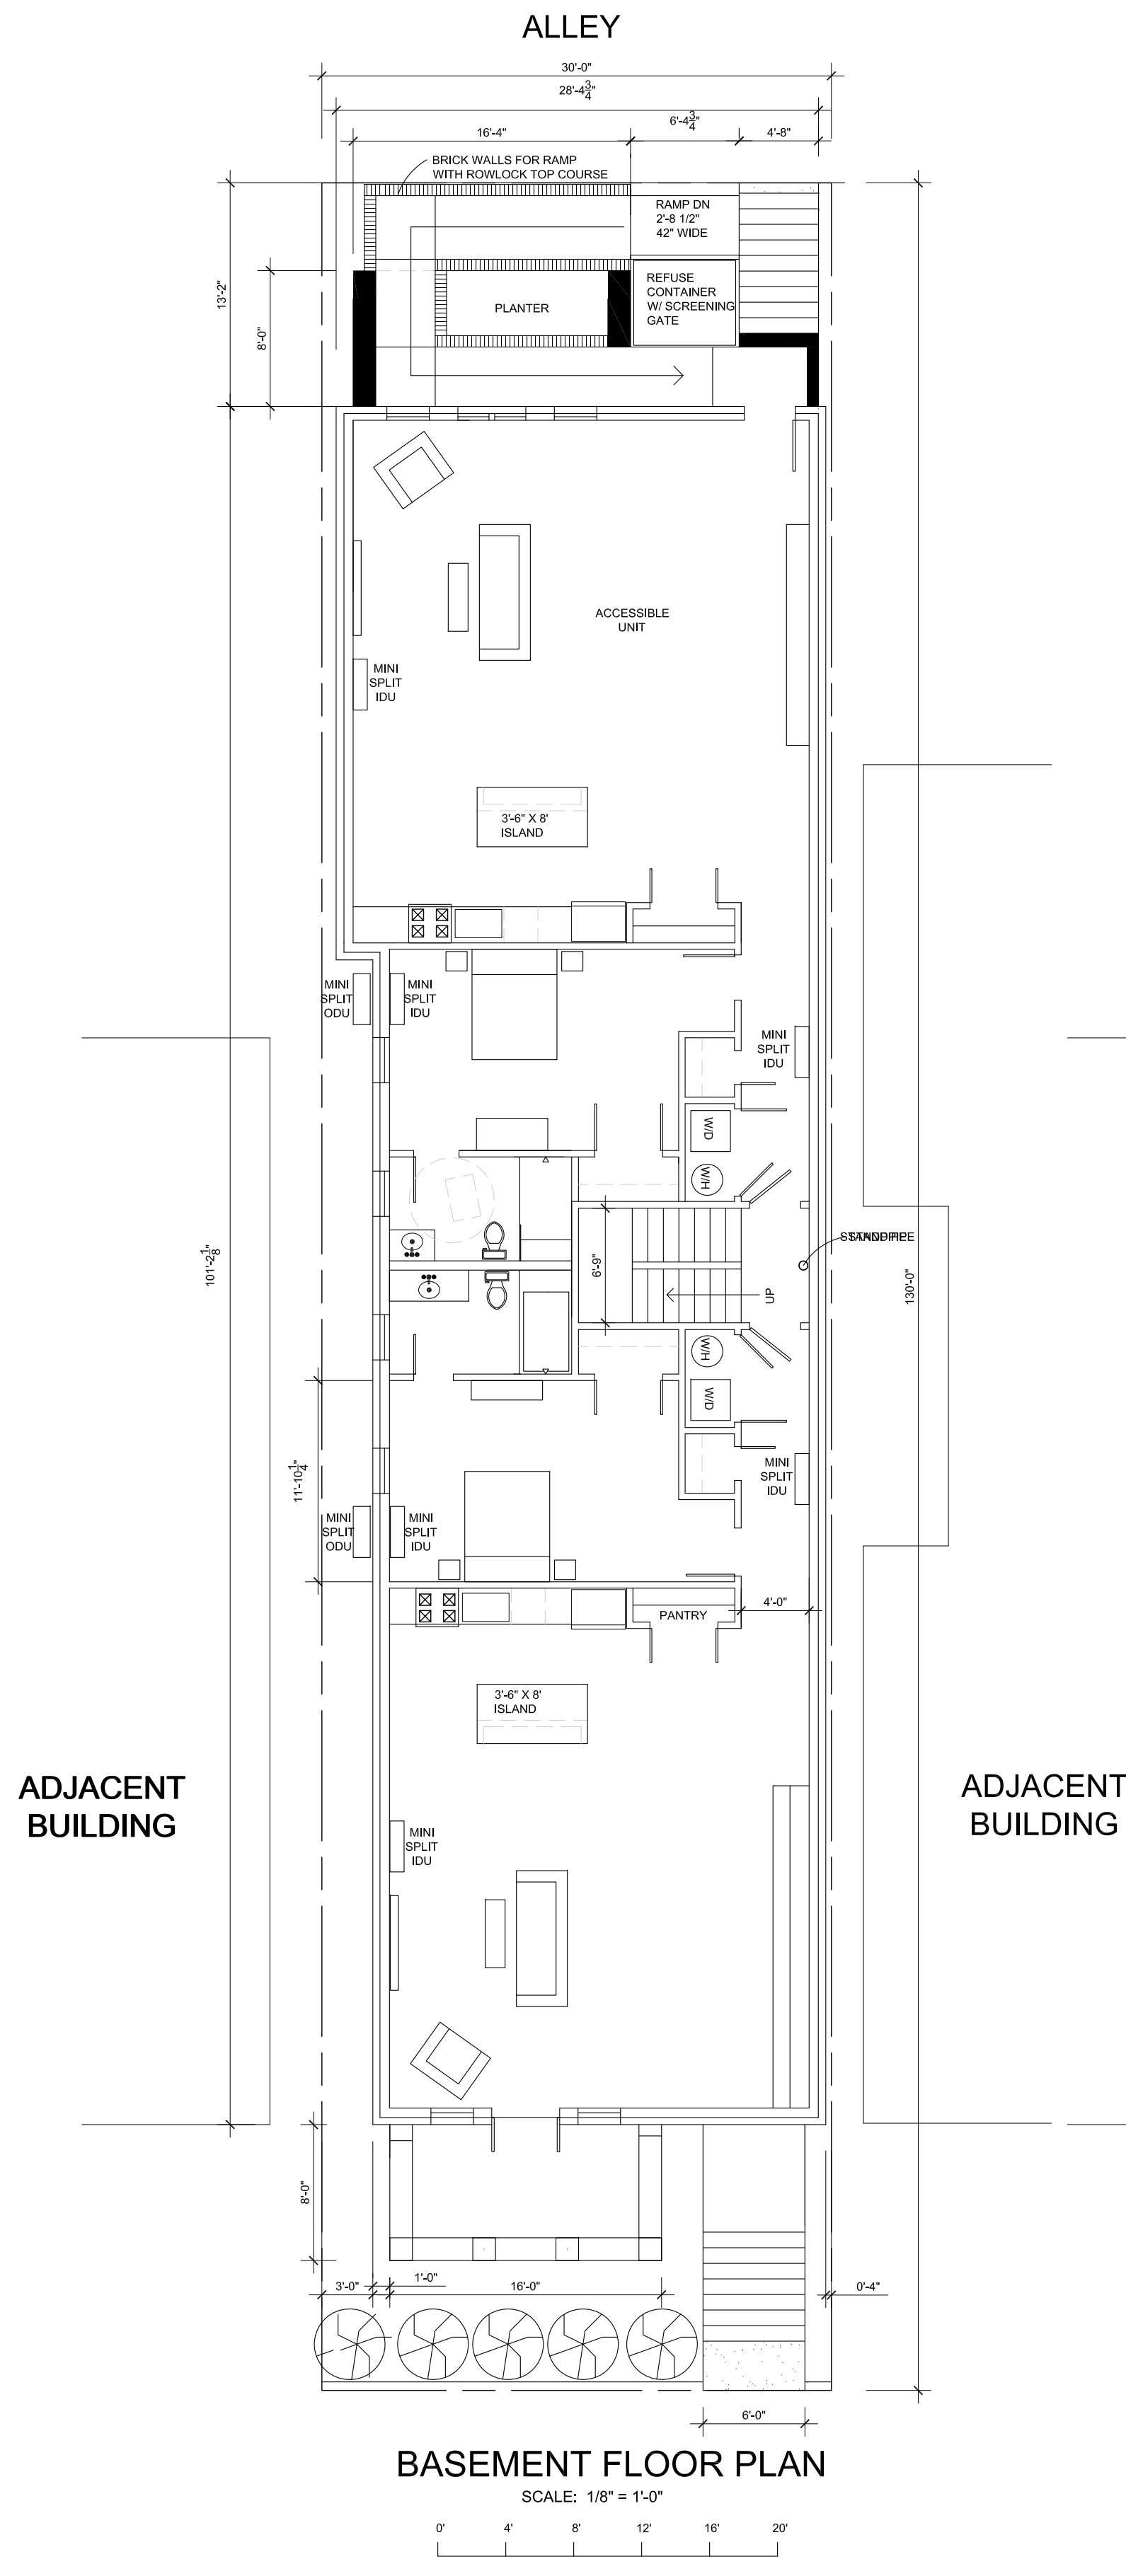


BASEMENT FLOOR PLAN
SCALE: 1/8" = 1'-0"

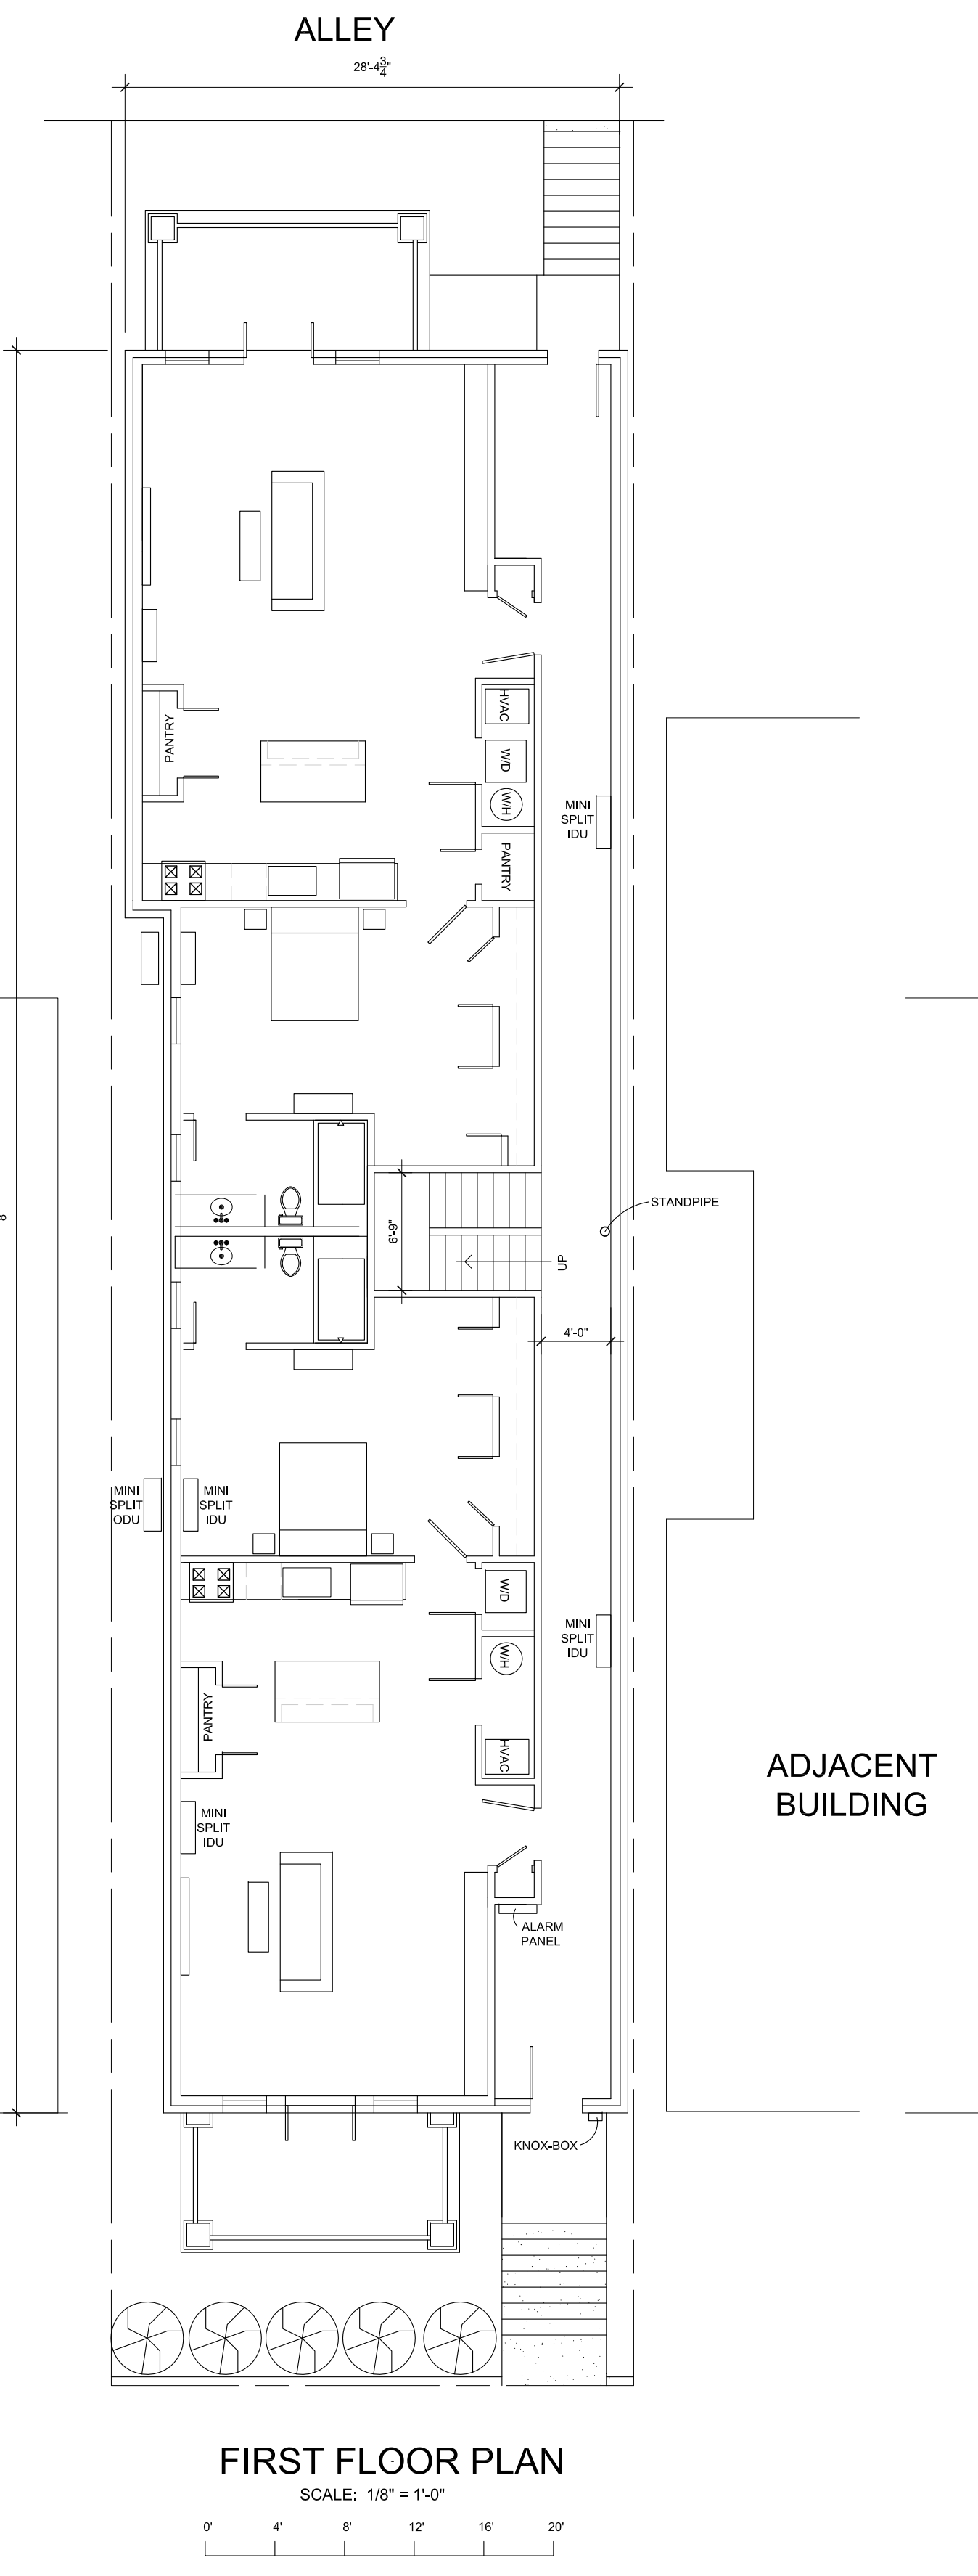

FIRST FLOOR PLAN
SCALE: 1/8" = 1'-0"

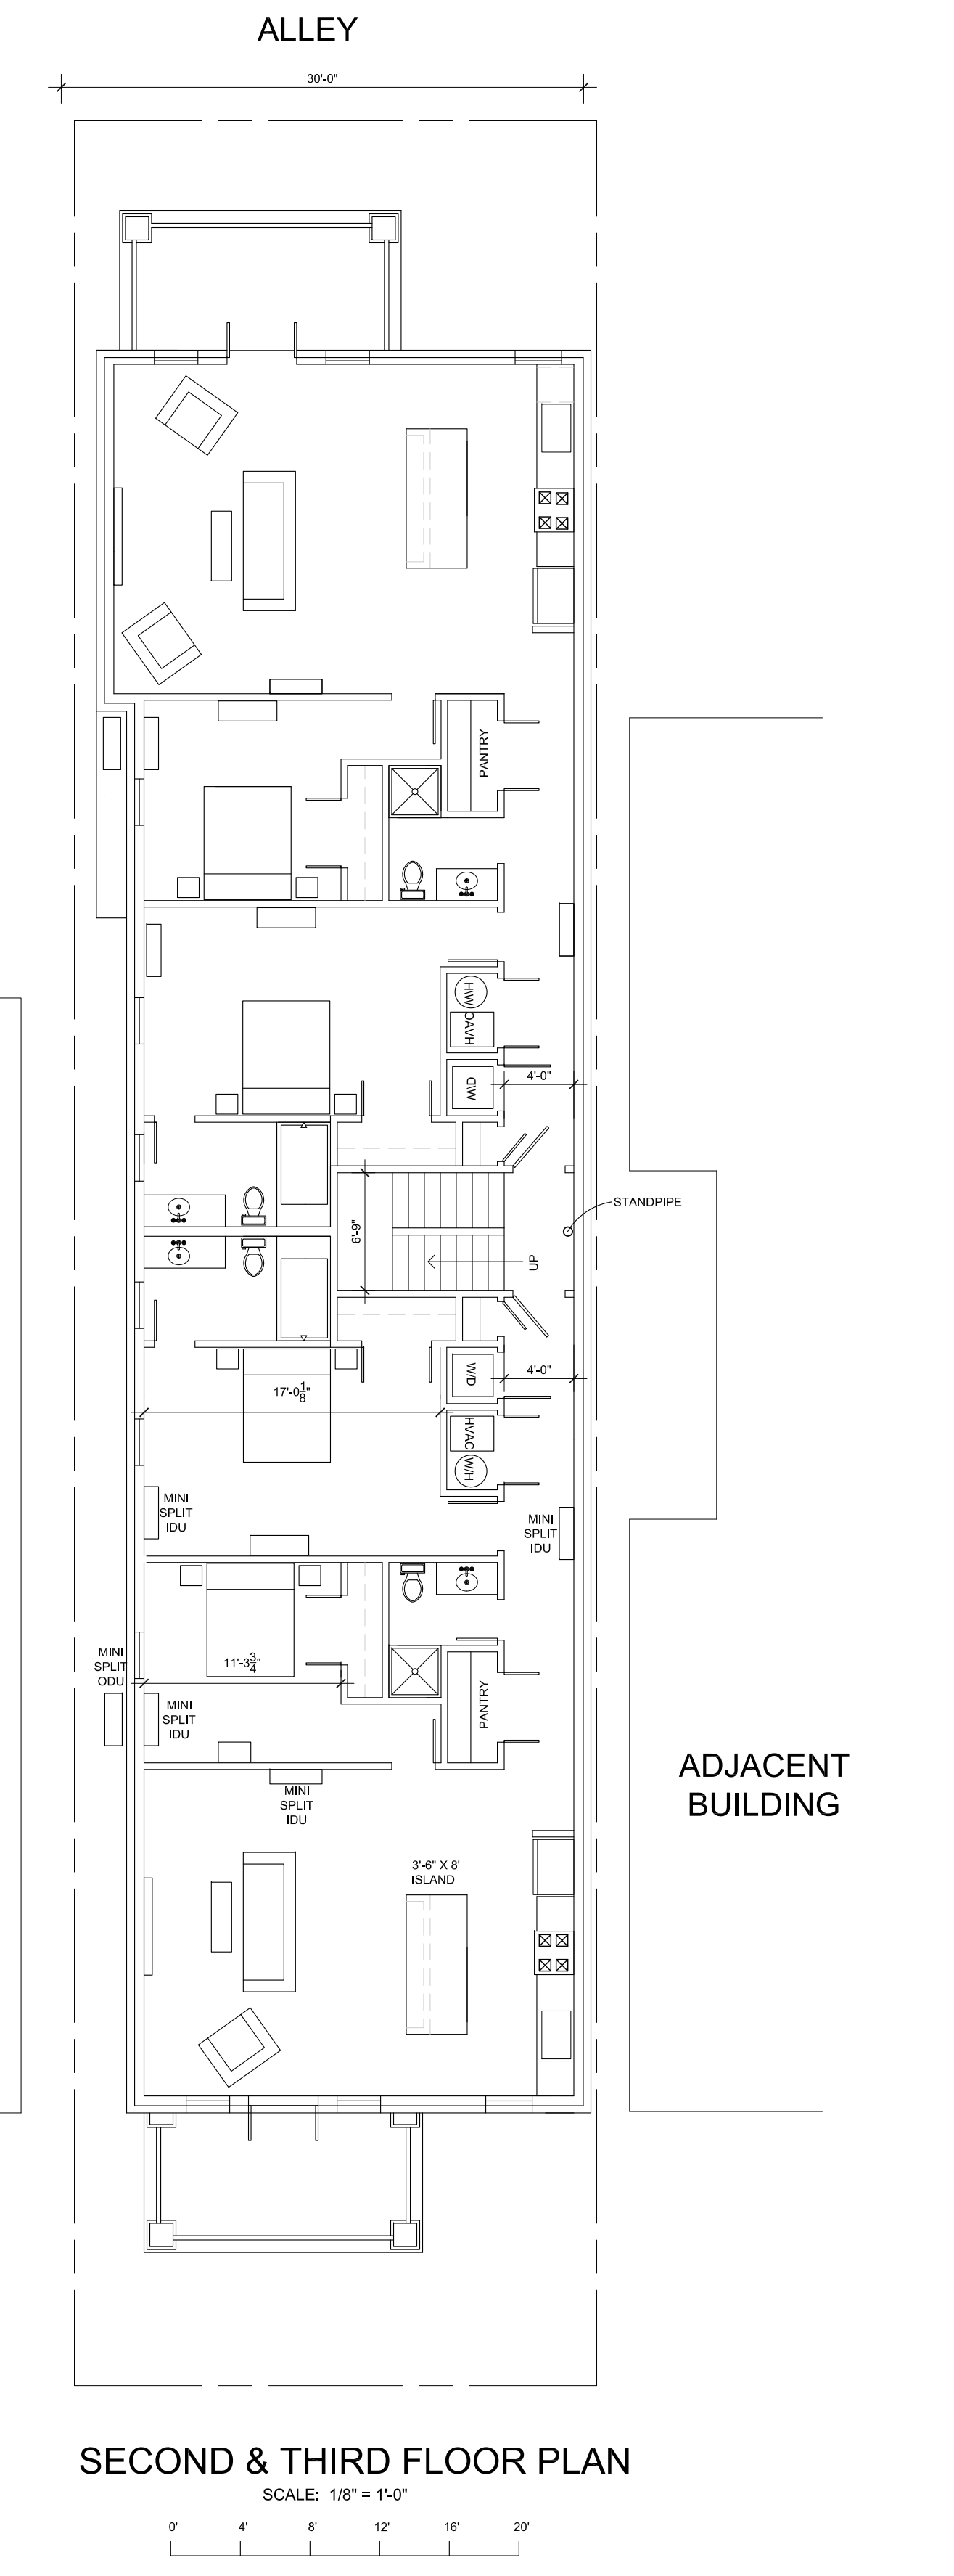

SECOND & THIRD FLOOR PLAN
SCALE: 1/8" = 1'-0"




ADJACENT BUILDING


ADJACENT BUILDING

ADJACENT BUILDING


ADJACENT BUILDING

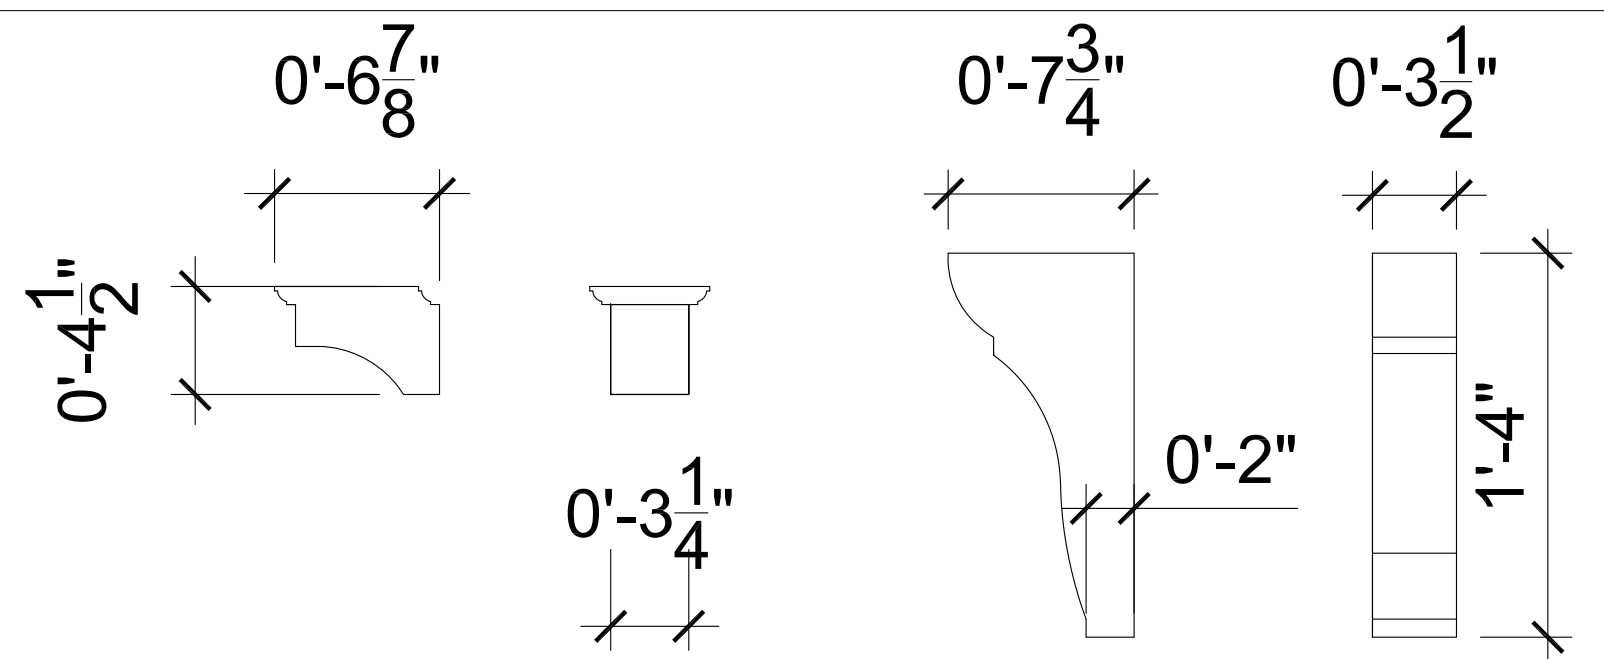


1
A-3
MEDALLION & CORBEL DETAILS
SCALE: 1-1/2" = 1'-0" FYPON SIMULATED WOOD

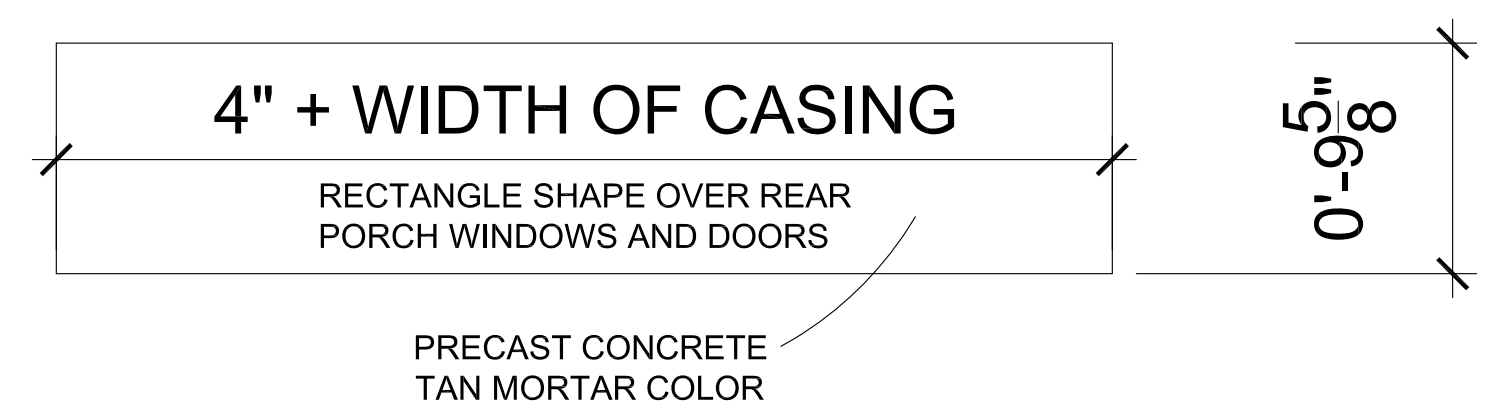


2
A-3
JACK ARCH
SCALE: 1-1/2" = 1'-0"

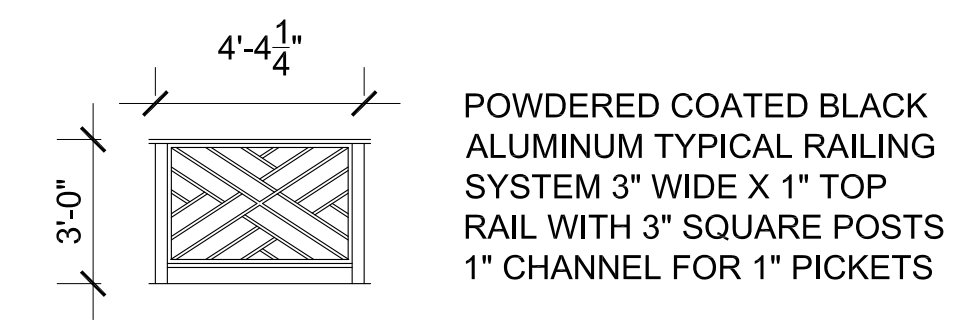


RAILING DETAIL
SCALE: 1/4" = 1'-0"

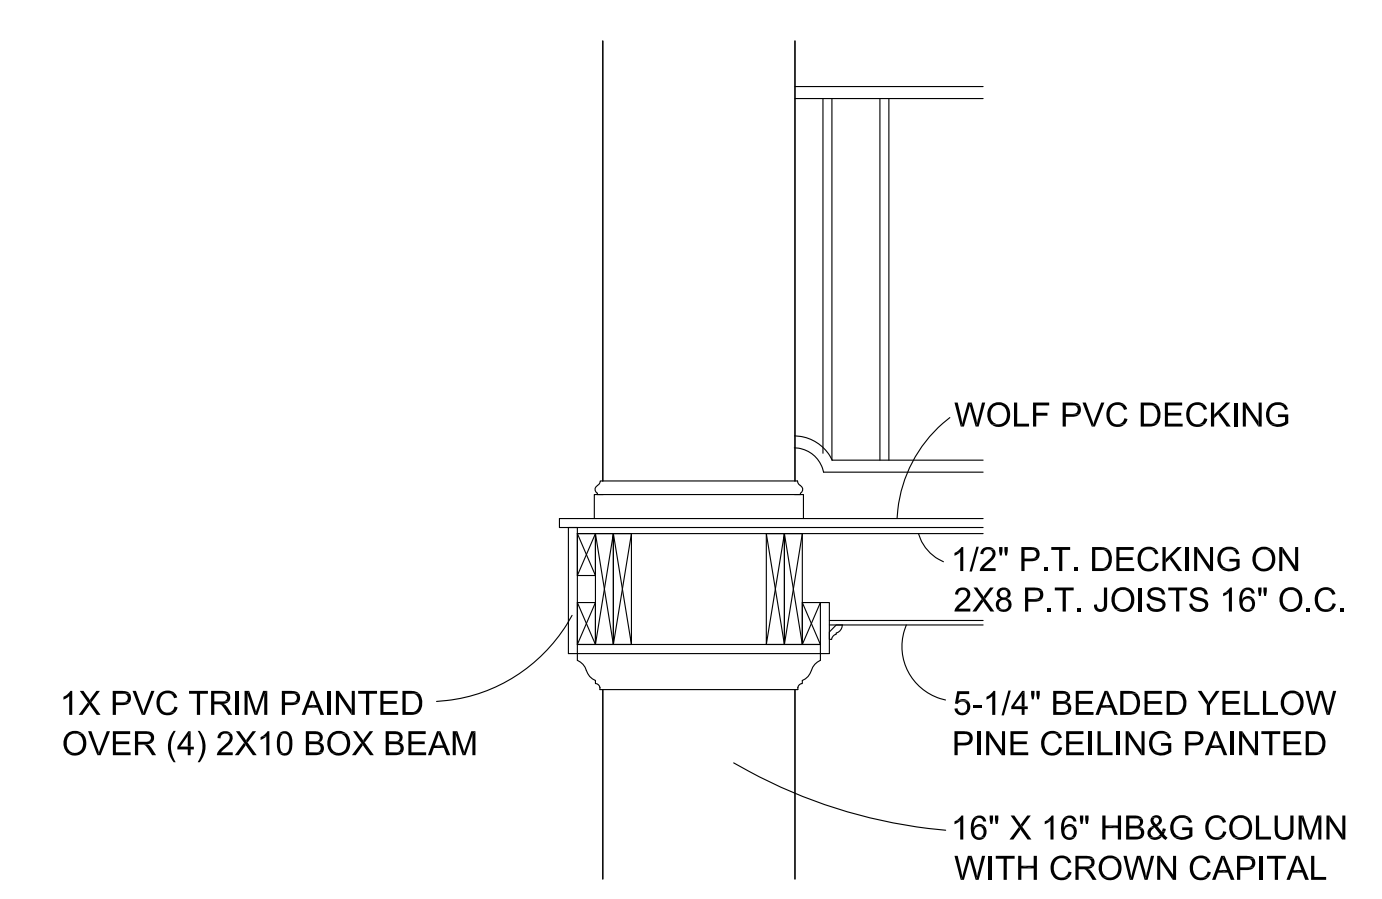


1
A-3
DECK COLUMN DETAIL
SCALE: 3/4" = 1'-0"

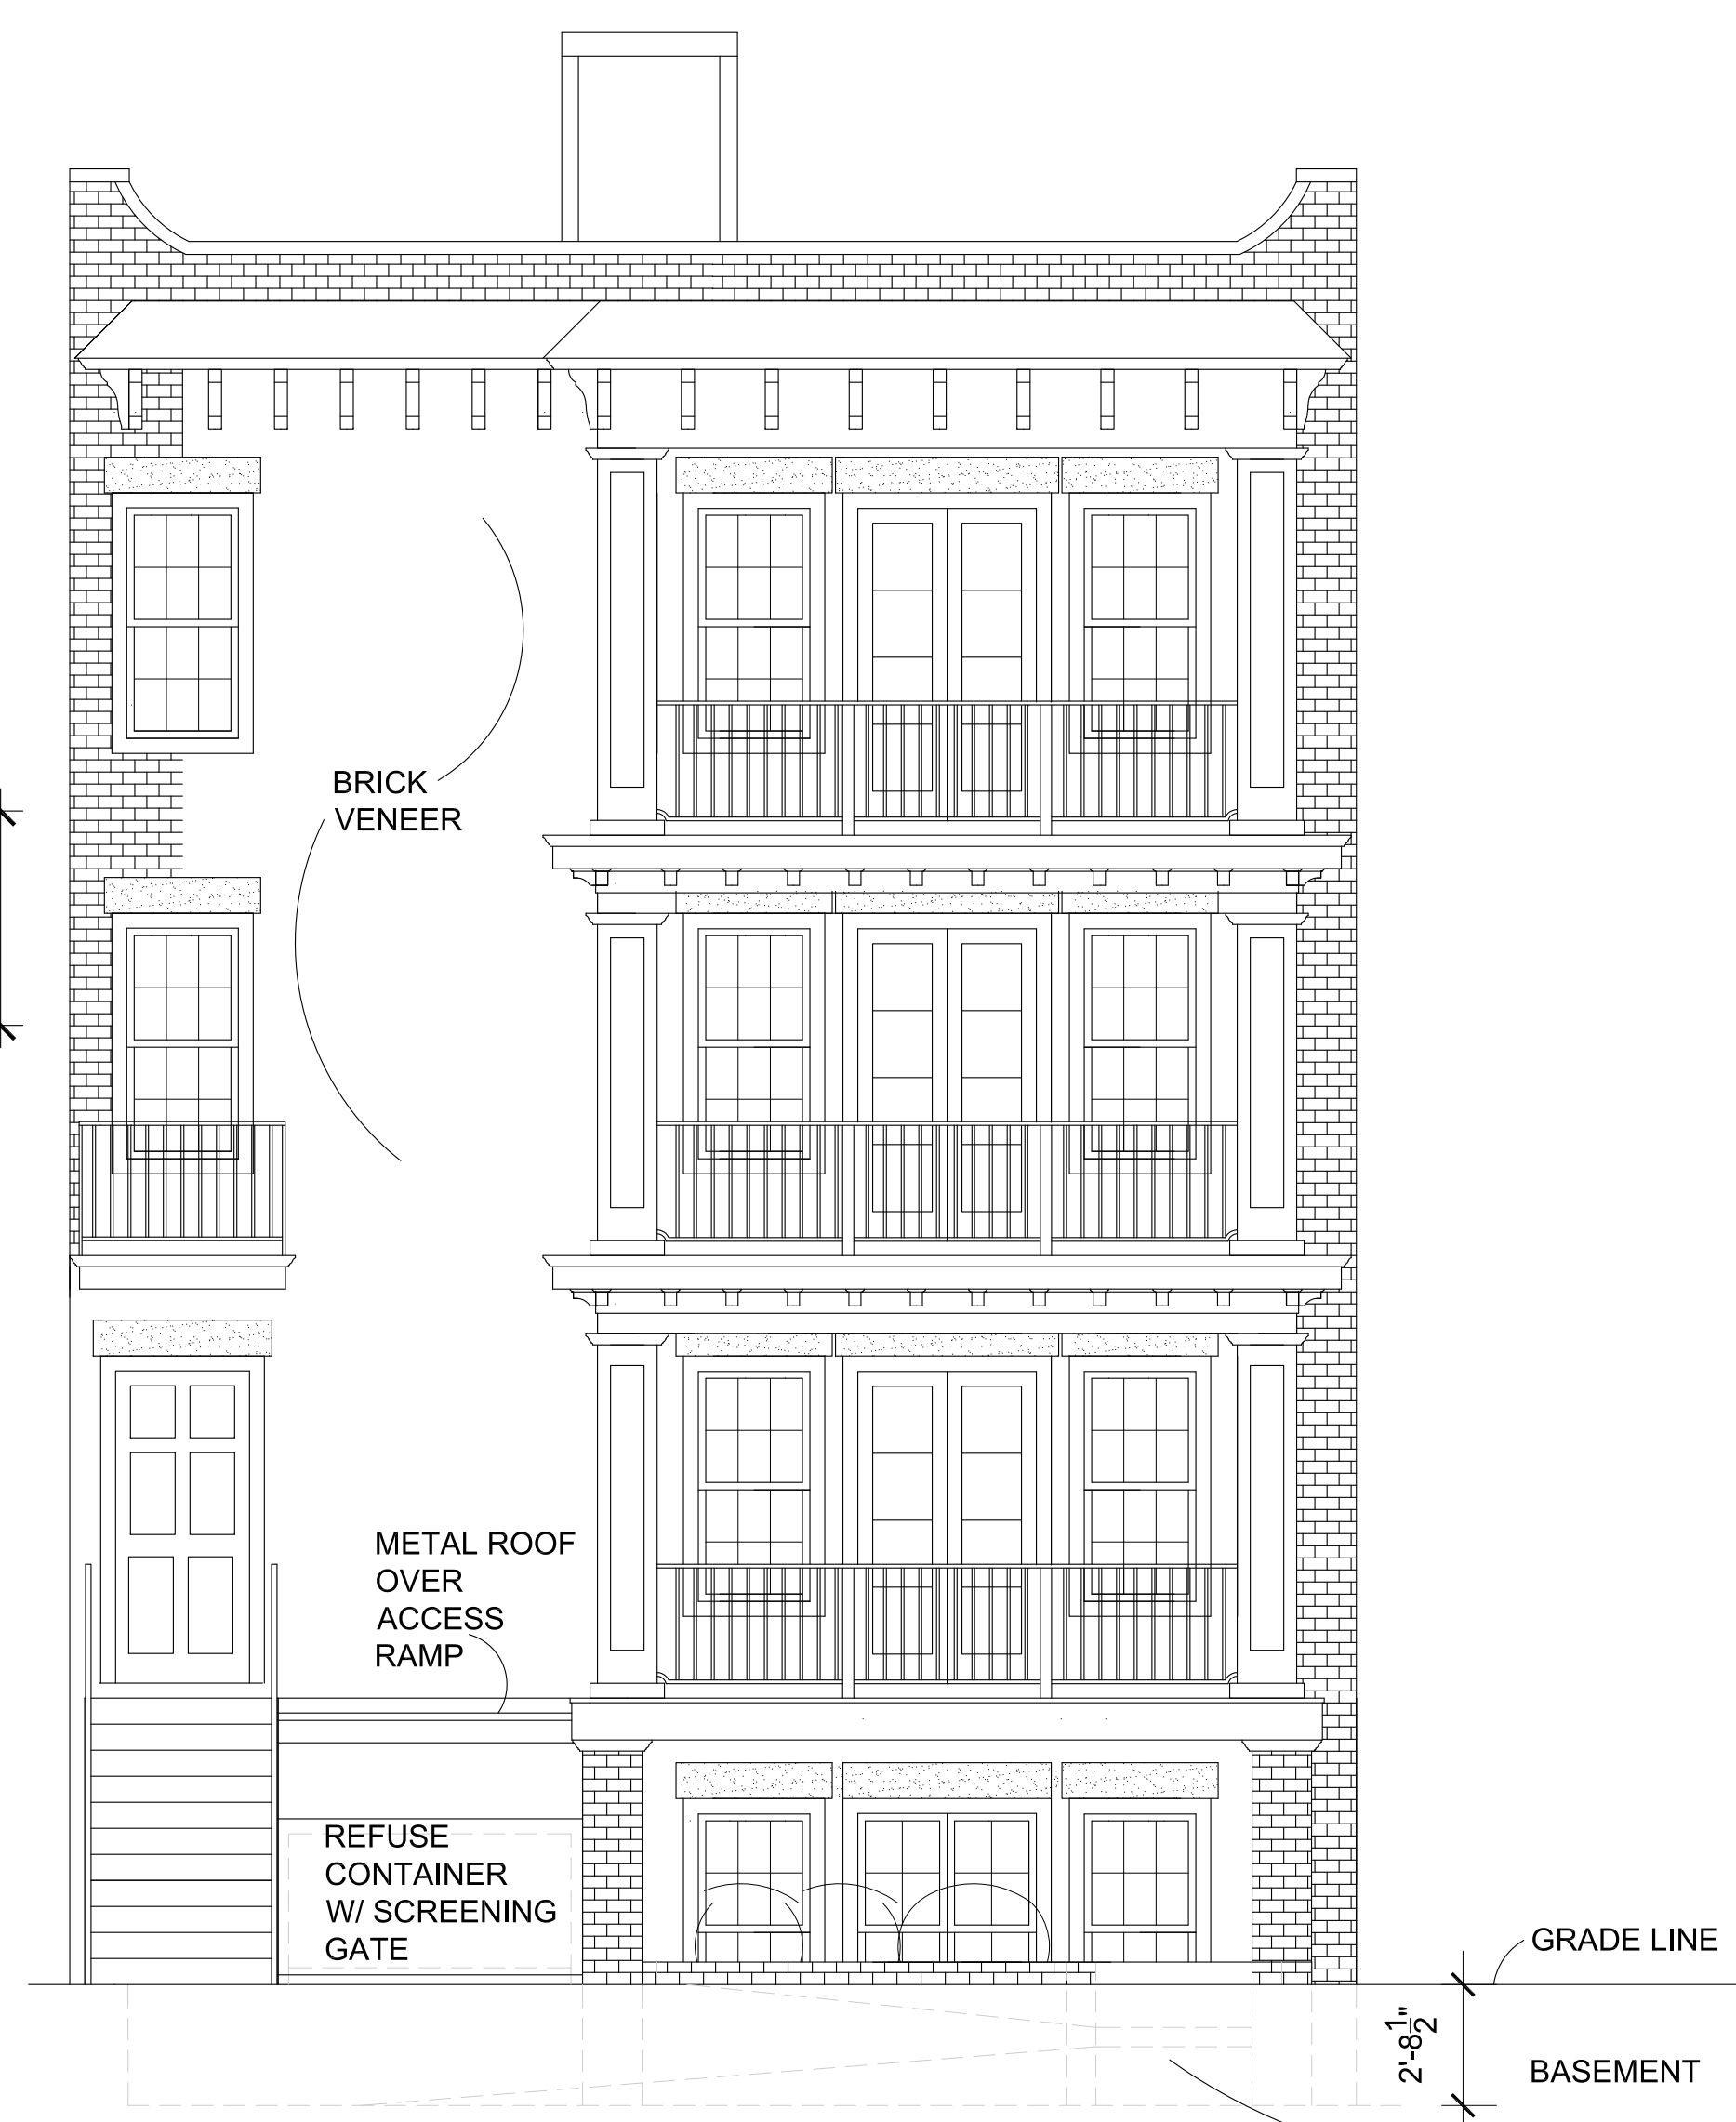

NORTH ELEVATION
SCALE: 1/4" = 1'-0"

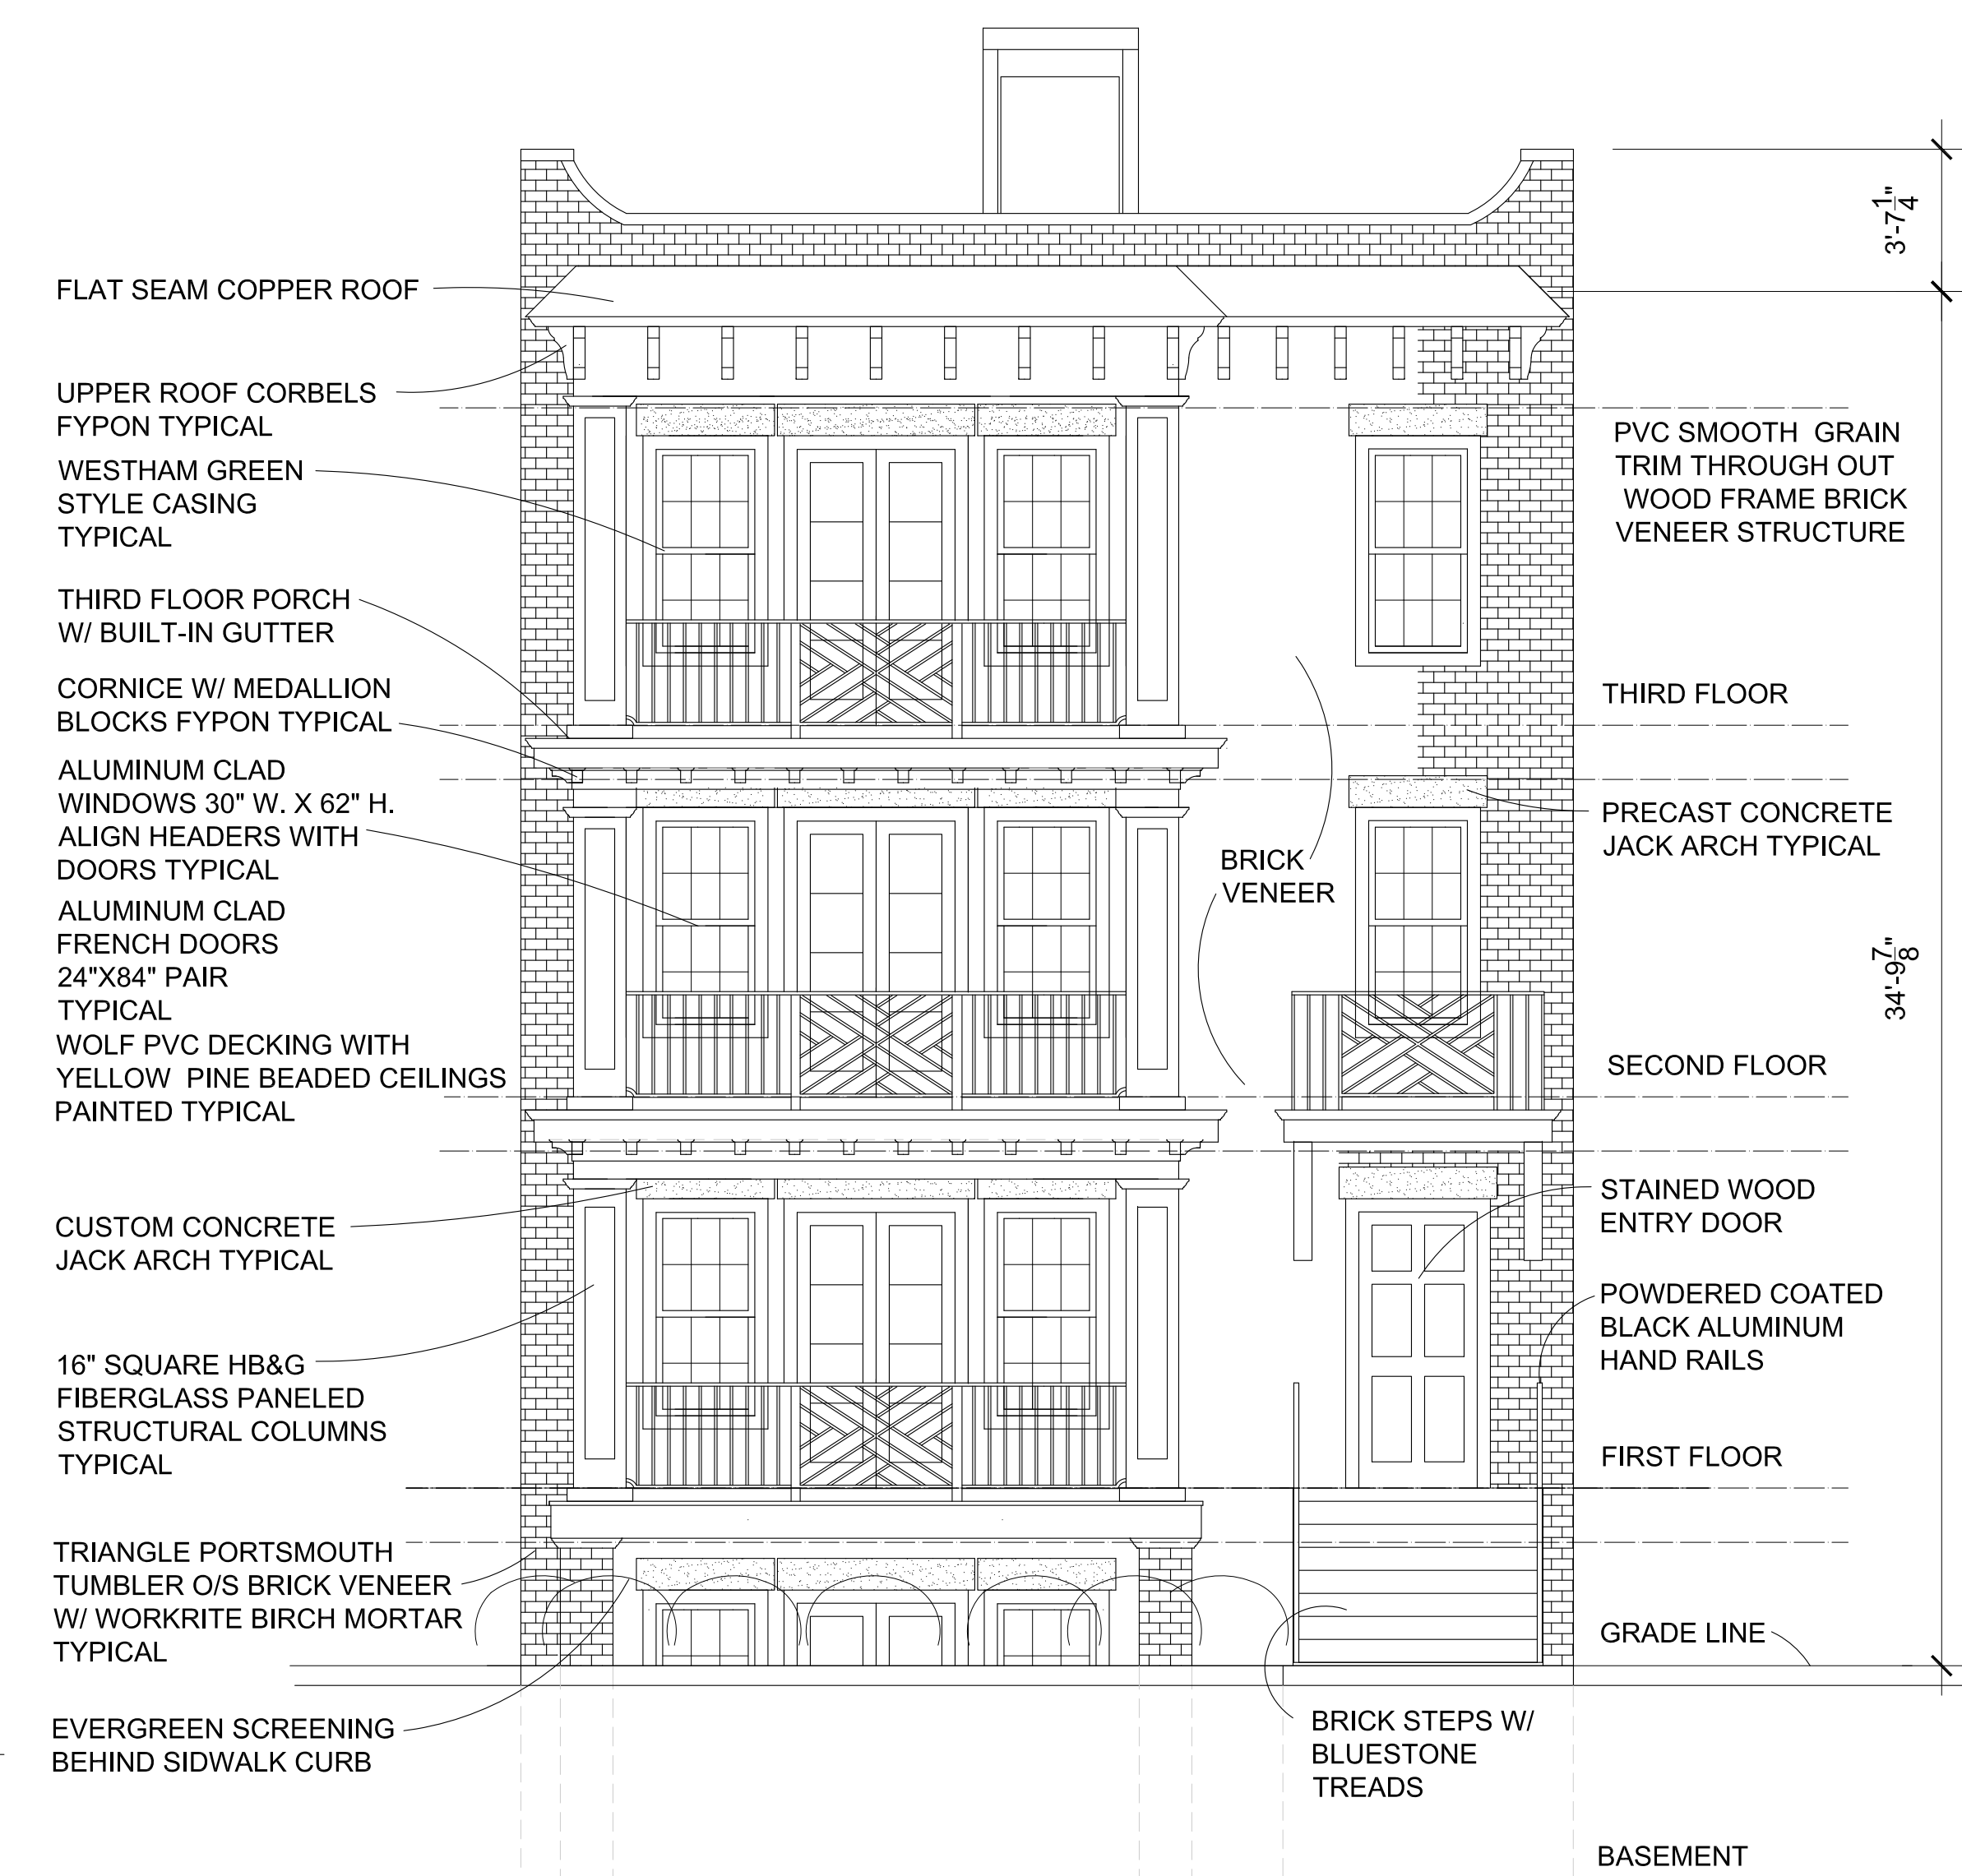

SOUTH ELEVATION
SCALE: 1/4" = 1'-0"

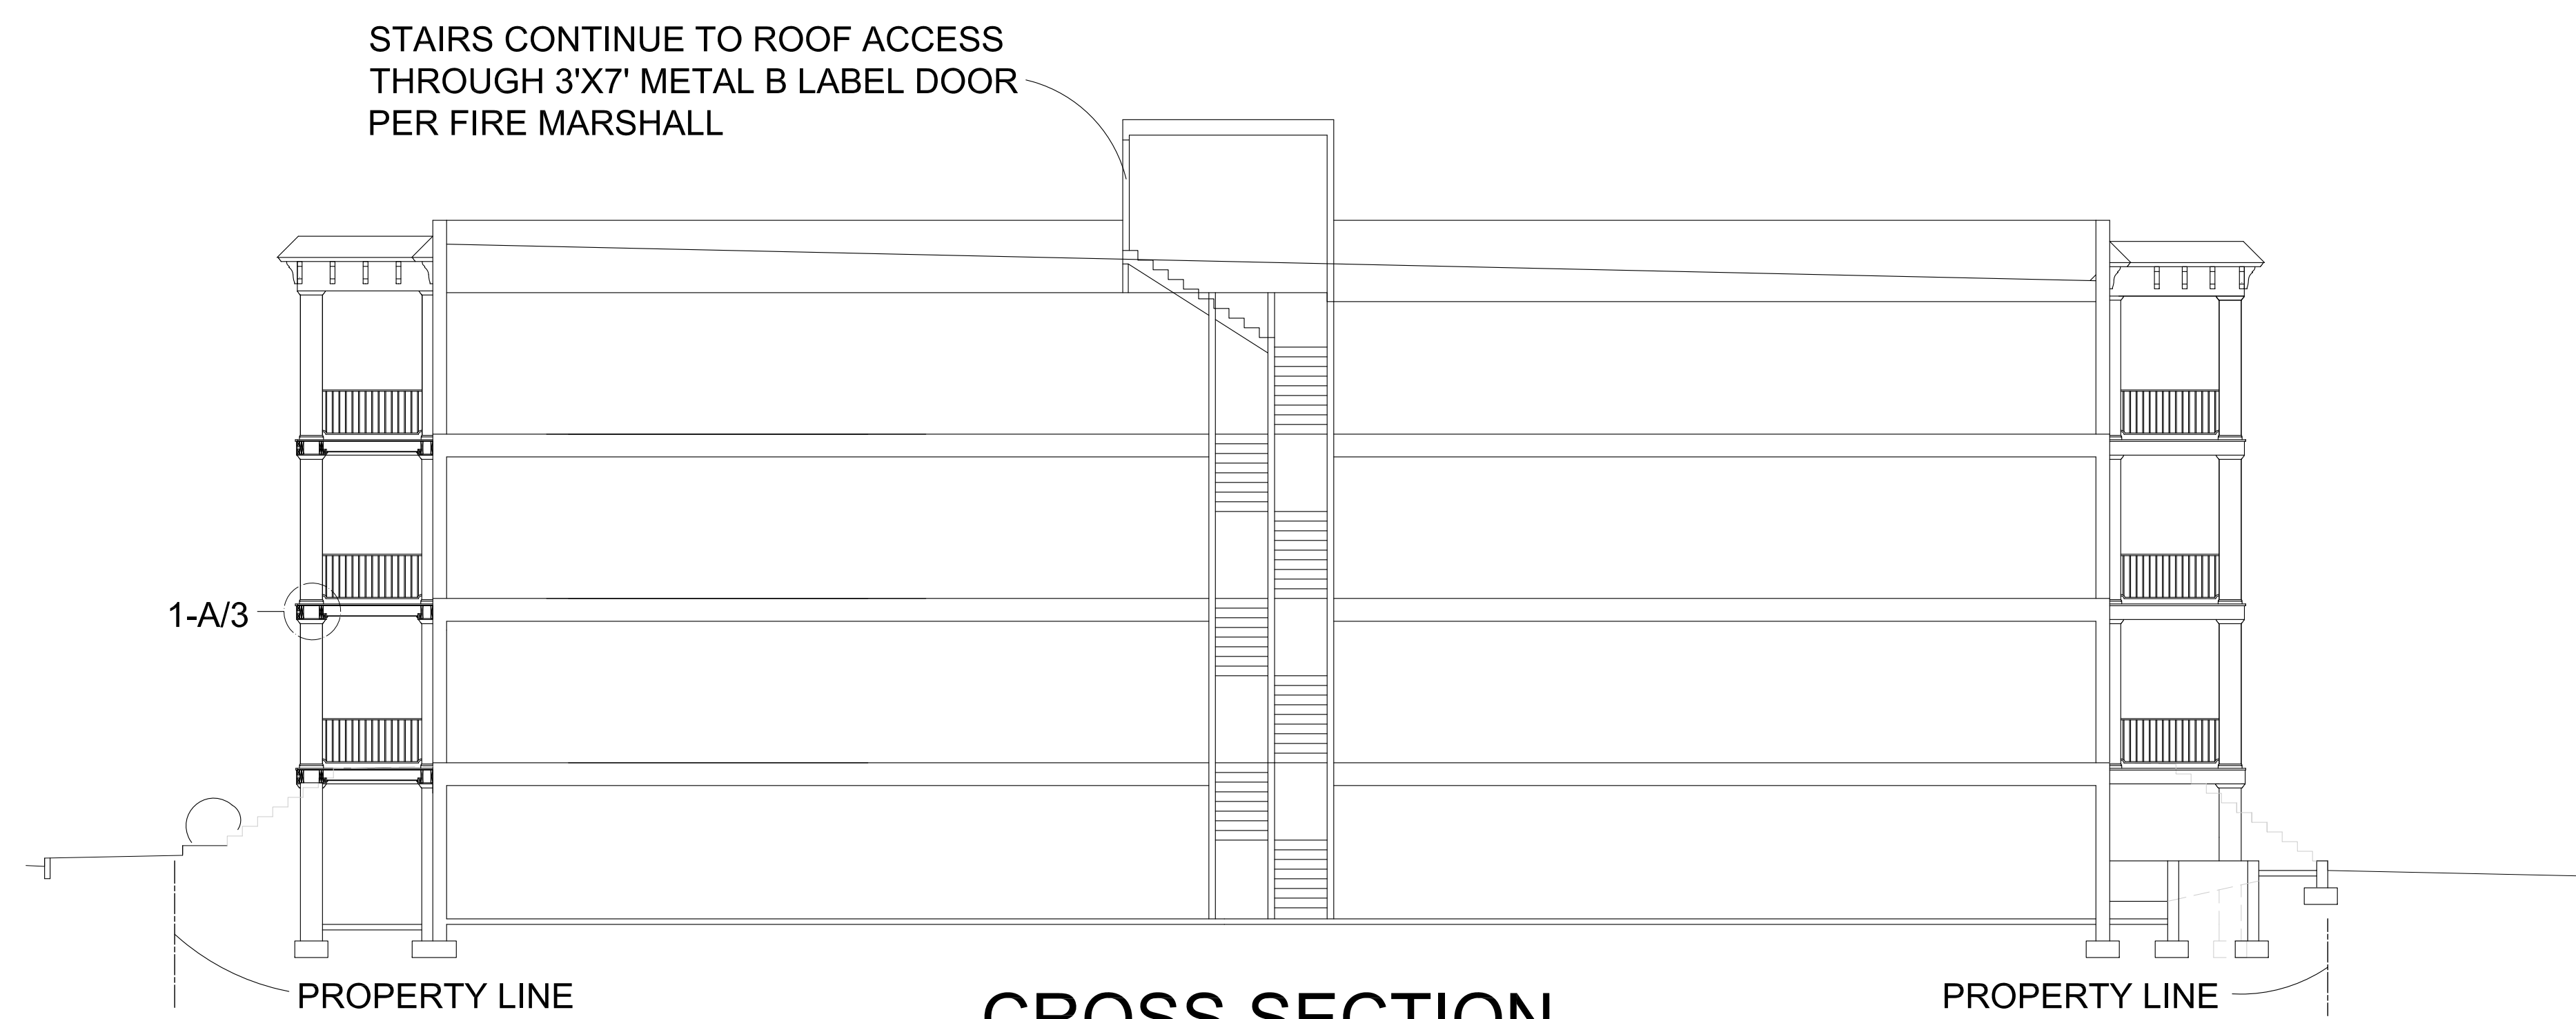

CROSS SECTION
SCALE: 1/8" = 1'-0"


Square **PERMA**Cast® Columns

SQUARE PERMACAST® INSIDE DIMENSIONS

Inside dimensions may vary up to 1/4".


Splitting a column will decrease inside dimension 1/4".

COL. SIZE	INSIDE
6"	5 1/4"
8"	6 1/2"
10"	9"
12"	11"
14"	13"
16"	15"




*Inside is Round

PANEL MOULDING FOR SQUARE PERMACAST®

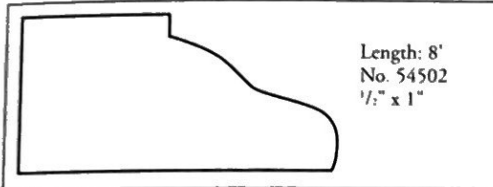

Plumb-Fit®

To make installation even easier our 6"-12" round and square poly Tuscan Cap and Base Sets with flashing cap come with the patented (Patent 9689674) Plumb-Fit® installation system included.

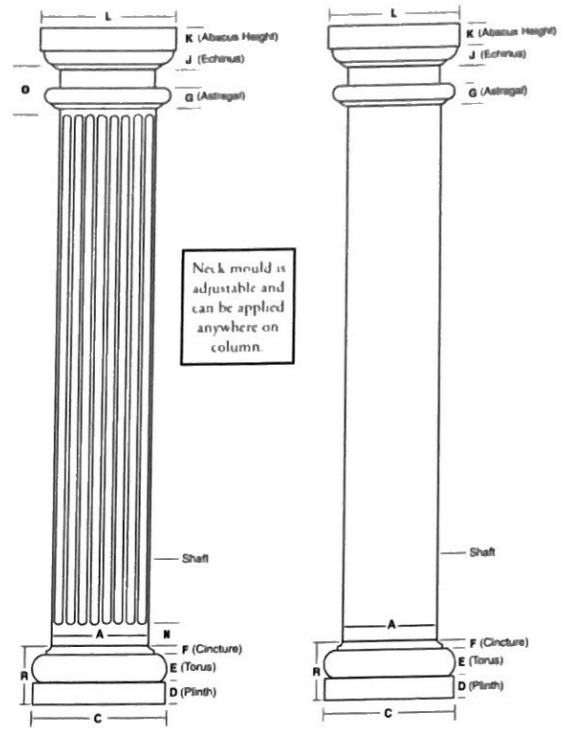

PermaCast® Square Column shown fluted with Poly Tuscan Cap and Base.

PermaCast® Square Column shown plain with Poly Tuscan Cap and Base.

SQUARE PERMACAST® COLUMN DIMENSIONS (In Inches)*

Column Size	A	C	D	E	F	G	J	K	L	N	O	R	Lengths Available (ft.)
6"	6"	9 1/8"	1 7/16"	1 1/16"	9/16"	1"	1 1/4"	1 3/8"	9 1/8"	N/A	N/A	3 3/16"	6,8,9,10
8"	8"	11 1/8"	1 7/8"	1 3/4"	5/8"	1"	1 1/4"	1 1/2"	10 5/16"	5"	3 1/8"	4 1/4"	6,8,9,10,12
10"	10"	13 1/16"	2 3/8"	2 5/16"	3/4"	1"	1 1/4"	1 3/4"	12 3/4"	3 3/4"	4 1/8"	5 7/16"	51",6,8,9,10,12,14,16
12"	12"	16 3/8"	2 13/16"	2 3/8"	7/8"	1"	1 7/8"	2 3/16"	16 3/8"	N/A	N/A	6 1/16"	8,9,10,12,14,16,18
14"	14"	19 3/8"	3 5/8"	2 7/8"	1 1/16"	1 1/8"	2 1/16"	2 1/2"	19 1/16"	N/A	N/A	7 7/16"	8,10,12,14
16"	16"	22 1/8"	3 7/8"	3 3/8"	1 3/16"	1 1/8"	2 3/8"	2 3/4"	21 1/2"	N/A	N/A	8 7/16"	8,10,12,14,16,18,20

Fluted Square.

*There may be a variance of up to 1/4" in all dimensions.







• Split columns are not load bearing. • See page 16 for Decorative Capital dimensions.

Versatility of Square Columns



The design and versatility of an HB&G square column has enhanced its popularity with today's architects. The HB&G Square PermaCast® column lineup includes plain, recessed panel, fluted, and Craftsman styles. An unlimited combination of styles can be achieved by various uses of the panel moulding, neck moulding, and caps and bases. Additionally, the square column is not tapered and can be cut to any height without affecting the fit of the caps and bases.

DECORATIVE MILLWORK











WOODGRAIN BRACKETS

		Part Number	Projection (A)	Height (B)	Overall Width (C)
STANDARD WOODGRAIN					
		BKT12X18X3X1S	12"	18"	3-1/2"
		BKT16X18X4S	16"	18"	4"
		BKT14X30X7.5S	13-1/2"	30"	7-1/2"

SMOOTH DENTIL BLOCKS

		Part Number	Projection (A)	Height (B)	Overall Width (C)
FLAT					
		DTLB3X3X3	3-1/2"	3-1/2"	3-1/2"

DECORATIVE

		DTLB4X5X8	7-3/4"	3-3/8"	5"
		DTLB6X6X9	9-3/8"	5-3/4"	5-1/2"
		DTLB9X8X8	9"	8-1/8"	8-1/8"
		DTLB4X4X7	7-1/4"	4-3/8"	5"
		DTLB5X8	5-7/16"	8-1/4"	4-13/16"

WOLF PVC TRIMBOARDS

PVC TRIMBOARDS ARCHITECTURAL SPECS

PART I—GENERAL

1.01 Section Includes

- A. Wolf PVC Trim Boards and Mouldings is cellular PVC used for corner boards, soffits, fascias, battens, door pilasters, frieze boards, rake boards, architectural millwork and window/door trim.

1.02 Related Sections

- A. Section 06 64 00 - Plastic Paneling.
- B. Section 06 65 00 - Plastic Simulated Wood Trim.
- C. Section 06 66 00 - Custom Ornamental Simulated Woodwork.

1.03 References

- A. AATC127 - Water Resistance
- B. ASTM C177 - Thermal Conductivity
- C. ASTM D256 - Izod Impact Resistance
- D. ASTM D570 - Water Absorption of Plastics.
- E. ASTM D635 - Burn Rate
- F. ASTM D648 - Heat Deflection Temperature
- G. ASTM D696 - Coefficient of Linear Thermal Expansion
- H. ASTM D790 - Flexural Properties of Un-reinforced and Reinforced Plastic and Electrical Insulating Materials.
- I. ASTM D792 - Density
- J. ASTM D1761 - Fastener Pull Through
- K. ASTM D3345 - Termite Resistance
- L. ASTM D5420 - Gardner Impact Resistance
- M. ASTM D6662 - Freeze-Thaw Resistance
- N. ASTM E84 - Surface Burning Characteristics
- O. ASTM E330 - Uplift Resistance
- P. ASTM G155 - Accelerated Weathering
- Q. AWPA E12 - Corrosion by Treated Wood

1.04 Submittals

- A. General: Submit listed submittals in accordance with Conditions of the Contract and Division 1 Submittal Procedures Section.
- B. Product Data: Submit product data, manufacturer's catalogs, SPEC-DATA[®] product sheet, for specified products.
- C. Samples: Submit three material samples representative of the texture, thickness and widths shown and specified herein.

1.05 Quality Assurance

- A. Regulatory Requirements: Check with Local Building Code for installation requirements.
- B. Allowable Tolerances:
 - 1. Variation in component length: - 0.00 / + 7/8"
 - 2. Variation in component Width: - 0 / + 1/16"
 - 3. Variation in component thickness: ± 5%
 - 4. Variation in component edge: ± 2°
 - 5. Density range: .58-.62
 - 6. Shore-D hardness: 45
- C. Workmanship, Finish, and Appearance:
 - 1. Wolf PVC Trim Boards and Mouldings are a free foam cellular PVC that is homogeneous and free of excessive voids, holes, cracks, foreign inclusions and other defects. The edges must be square and top and bottom surfaces shall be flat with no convex or concave deviation.
 - 2. Uniform surface free from cupping, warping and twisting.



WOLF PVC TRIMBOARDS

PVC TRIMBOARDS ARCHITECTURAL SPECS

Part I—GENERAL (continued)

1.06 Delivery, Storage and Handling

- A. Materials should be stored on a flat and level surface on a full shipping pallet. Handle materials to prevent damage to product edges and corners. Store under provided protective covering to prevent jobsite dirt and residue from collecting on the boards.

1.07 Warranty

- A. Provide manufacturer's limited lifetime warranty against defects in manufacturing that cause products to rot, corrode, delaminate or excessively swell from moisture.

Part II—PRODUCTS

2.01 Materials

- A. Material: free foam cellular PVC material with small cell microstructure and an average density of .60 grams/cm³.
- a. Materials shall have a minimum physical and performance properties specified in section B of this document.
- B. Performance and physical characteristic requirements:

TEST	TEST METHOD	TYPICAL PROPERTY
Density, g/cm ³	ASTM D792	0.60
MOR (Flexural Strength), psi	ASTM D790	3,600.0
MOR (Flexural Modulus), psi	ASTM D790	144,000.0
WEATHERING		
MOR Change, %	ASTM G155 & D790	+2.4% (Pass ICC AC227)
MOE Change, %		+0.7%
FREEZE-THAW		
MOR Change, %	ASTM D6662 & D790	+0.1% (Pass ICC AC227)
MOE Change, %		+0.9%
Water Resistance	ASTM D570 & AATCC 127	No Penetration (Pass ICC AC227)
Water Absorption, 24 hrs, %	ASTM D570	<0.3%
Termite Resistance	ASTM D3345	9.2 (Pass ICC AC227)
Surface Burning, Flame Spread Index	ASTM E84	25
Burning Rate	ASTM D635	No burn when flame removed
Mechanical Fastener, Allowable Load, lbf	ASTM D1761	151 (8d nail and 1" thick trim)
Negative Transverse Wind Load, psf	ASTM E330	72
Gardener Impact Resistance, in-lbf	ASTM D5420	629 (3/4" thick trim)
Coefficient of Linear Thermal Expansion, °F-1	ASTM D696	3.5 x 10 ⁻⁵
Heat Deflection Temp., °F @ 264 psi	ASTM D648	146
Corrosion by Preservative Treated Wood	AWAP E12	No Wt. Loss (Pass ICC AC227)
Izod Impact, Notched, ft-lb/in	ASTM D648	0.37
Heat Conductivity, btu-in/hr-ft ² -°F	ASTM C177	0.50



WOLF PVC TRIMBOARDS

PVC TRIMBOARDS ARCHITECTURAL SPECS


Part III—EXECUTION

CUTTING

- Use standard wood working equipment for cutting.
- Carbide tipped blades are recommended.
- Avoid using fine tooth metal cutting blades.
- Rough edge from cutting may be caused by excessive friction, poor board support, or improper tooling.

FASTENING

- Use standard nail guns/wood working tools.
- Stainless steel or hot-dipped galvanized nails/screws are recommended.
- Do not use brads, staples, wire nails or fine-threaded wood screws.
- Place nails and screws on center of board and keep approximately $\frac{3}{4}$ " from each edge.
- Fasteners should penetrate into flat, solid wood substrate or framing member a minimum of 1- $\frac{1}{2}$ "
- If nailing product at 32°F or below, pre-drilling is required.
- Pre-drilling and/or counter-sink are typically not required unless a larger fastener is used.
- As with wood, use 2 fasteners per every framing member for trimboard applications. Trimboards 12" or wider, as well as sheets, will require additional fasteners not to exceed 8" on center.
- Fasteners must be installed within 2" of the end of each board.




PAINTING

- Wolf Trimboards do not require paint for protection, but accept and hold paint very well.
- Clean surface prior to painting.
- Follow paint manufacturer's recommendations.
- If you choose to paint, use a 100% acrylic latex paint with colors having a Light Reflective Value (LRV) of 55 or higher.
- For darker colors (LRV of 54 or lower), use paints specifically formulated for use on vinyl/pvc products.
- Acrylic or urethane based latex exterior or interior paints are recommended.
- Prior to painting, exterior sandable spackle is recommended for filling nail holes.

GLUING/TOUCH UP

- For the best result, use Extreme Adhesives to glue all joints between trim pieces such as long fascia runs, window surrounds, etc., to prevent joint separation.
- Glue joints should be secured with fasteners on each side of the joint.



TOUCH UP

- Clean with a damp cloth with soap and water.
- Use Extreme Adhesives nail sticks on unpainted allocations.
- Use Fill n Flex for unpainted caulking applications.

DRILLING, ROUTING and HEAT BENDING

- Use standard wood working drills and routers.
- Care should be taken to avoid frictional heat build-up.
- Periodic removal of shaving from the drill hole may be necessary.
- Carbide tipped router bits are recommended.
- If nailing products at 32° F or below, pre-drilling is required.
- Optimal temperature for heat bending is between 260° and 275° F. Temperatures exceeding 275° F may cause discoloration.

MOISTURE

- Wolf Trimboards do not absorb moisture, and can be installed at or below grade.
- It is perfect for use in moisture prone applications such as ground contact, masonry contact, hot tub surrounds, freeze boards, rooflines and garage door jambs, etc.

EXPANSION & CONTRACTION

- Wolf Trimboards expand and contract with changes in temperature. Allow $\frac{1}{8}$ " space per 18 foot for expansion and contraction. Joints between pieces should be glued to eliminate joint separation — see "Gluing" section.
- Properly fastening Wolf Trimboards along entire length will minimize expansion and contraction.
- $\frac{3}{8}$ " and $\frac{1}{2}$ " sheet product is not intended to be ripped into trim pieces. These profiles must be glued to a substrate and mechanically fastened.
- When gaps are glued on a long run of the board, allow suitable expansion and contraction space at ends of the run.
- Scarf joints are recommended to minimize seams and allow expansion and contraction.
- Construction adhesive is recommended to reduce expansion and contraction between trim and substrate.

SPANNING

- Never span Wolf Trimboards more than 24".
- Must not be used in load bearing applications, but may be used in spanned applications such as soffits and ceilings, with suitable thickness
- When using $\frac{1}{2}$ " Wolf Trimboard Beadboard, use 12" OC framing as well as use a high quality construction grade polyurethane adhesive on joists.
- For spans greater than 12" OC, use $\frac{5}{8}$ " Wolf Trimboard Beadboard, or use a minimum $\frac{1}{2}$ " backer such as plywood or OSB with construction grade adhesive and mechanical fastening a minimum of every 8". Fasteners should hit joist or framing when possible.

STORAGE AND HANDLING

- Store on a flat and level surface.
- Should be handled in a fashion as pine, because it has a density comparable to pine with more flexibility.
- Keep product free of dirt and debris

CLEANING

- Wolf Trimboards may be cleaned with denatured alcohol, mild detergent or soap and water. Other household cleansers may be used but should be tested in an inconspicuous area before use.



Part III—EXECUTION (continued)

3.02 Heat Bending

Wolf PVC Trim can be easily heated and bent into a variety of shapes. More time and money is spent when constructing the same shapes from wood, wood composite, plywood, and engineered wood products. Wood products must be routed, sanded, glued and finish coated to get the same results.

Some specific tools and equipment are required when bending WOLF PVC Trim. These includes hot air circulation ovens, band heaters, heating blankets or radiant heaters. Determining which equipment is right for your project depends on the shape, area, thickness and quantity.

Safety Warnings and Guidelines:

1. Bent material must be evenly headed.
2. We recommend heat of approximately 270°F, but not to exceed 320°F. If band heaters or heating blankets are used, a lower temperature approximately 250°F is recommended due to direct heat contact with the board.
3. Heat 3/4" x 3-1/2" WOLF PVC Trim for approximately 10 minutes in ovens or 15 minutes if using heat blankets (approximately 3 minutes per 1/4" thickness). Heating time should be adjusted according to the following conditions:
 - Thickness, width and length of board
 - Heating equipment and its capacity
4. Once the heated board reaches a workable state (flexible enough to bend), bend it to the proper mold and hold it in place with clamps for best results. Cool the bent product to room temperature with natural or forced air.
5. Indications of overheating are rough surfaces, bubbling, discoloration and yellowing.
6. Always handle with care and wear heat protection gloves during the process. Refer to our materials safety data sheet for material handling specifications.

