

JOB \_\_\_\_\_

TYPE \_\_\_\_\_

NOTES \_\_\_\_\_

APPROVALS \_\_\_\_\_

## FEATURES

- Sealed IP68 LED light engine
- Bluetooth connectivity for remote control aiming and dimming
- Free Mobile App for Android and iOS
- Easy to install and pair devices
- Advanced thermal management provides long life in excess of 100,000+ hours
- Runs cool to the touch - less than 40°C

## CERTIFICATIONS



## SPECIFICATIONS




Pour Box rough-in housing ships separately and as a quick-ship if requested.

### LTV81SS



### LTV83SS

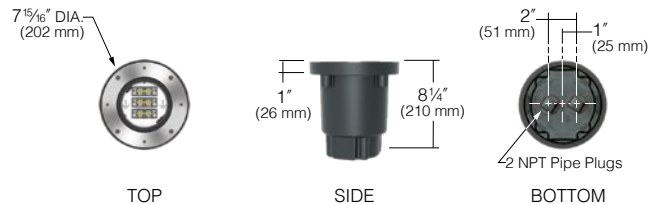


### LTV82SS



## LIGHT DISTRIBUTIONS:

LTV81SS, LTV82SS, LTV83SS

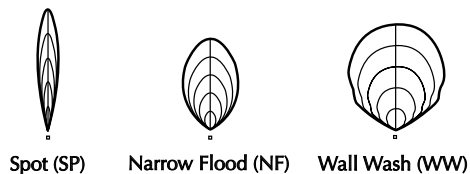

## DEBRIS SHIELDS



## ORDERING CODE

LTV8xSS							
Fixture Size	Distribution*	Source	Electrical Module		Lens Options <sup>1</sup>	Rebar Cage Anchor	
LTV81SS 13" Dia.	SP, NF, WW	36L 36 LEDs	Color Temperature	Voltages	SR Slip-Resistant Lens	RCA81 for LTV81	
LTV82SS 10-3/8" Dia.	SP, NF, WW	18L 18 LEDs	3K 3000K	UV 120-277V	PL Prismatic Lens	RCA82 for LTV82	
LTV83SS 7-15/16" Dia.	SP, NF, WW	12L 12 LEDs	4K 4000K			RCA83 for LTV83	
			5K 5000K				

\* SP = Spot, NF = Narrow Flood, WW = Wall Wash

Kim Lighting reserves the right to change specifications without notice.



**PINE HALL BRICK**  
BUILD YOUR DREAMS.

[HOME](#) [ABOUT](#) [OWNERS](#) [PROFESSIONALS](#)

Showing 1-12 of 14 results



**PATHWAY FULL  
RANGE**



**PATHWAY RED**



**PATHWAY COCOA  
FULL RANGE**



**PATHWAY  
AUTUMN**



**COURTYARD  
BEALE STREET**



**PATHWAY ROSE**



## PINE HALL BRICK

BUILD YOUR DREAMS.

August 16, 2018

Riverside Brick & Supply  
1200 Maury Street  
Richmond, VA 23224  
Attn: Regina Henderson

Project: Suaer Center Painting, Richmond VA  
Architect: H G Design Center  
Mason: James River Industries

We certify that the **Pine Hall 2 1/4" x 4" x 8" Pathway Red pavers** meet ASTM C-902, Class SX, Type 1, Application PX and C-67 for freeze & thaw and efflorescence testing for the above-mentioned project.


Sincerely,

*PINE HALL BRICK CO., INC.*

Walt Steele  
Paver Business Manager

WS/sc

Subscribed and sworn to before me,  
Tara E Reifsnider, Notary Public, this  
the 16<sup>th</sup> day of August 18.

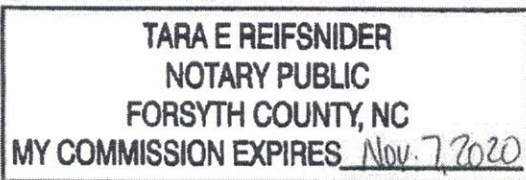  
Notary Public

\* ALL DIMENSIONS ARE IN INCHES \*



TOLL FREE (USA & CANADA): 1-888-ANTI-RAM (888-268-4726)

410-286-3375 : FAX 410-479-0175

P.O. BOX 307, DUNKIRK, MD 20754 U.S.A.

INFO@SECURESITEDESIGN.COM

WWW.SECURESITEDESIGN.COM

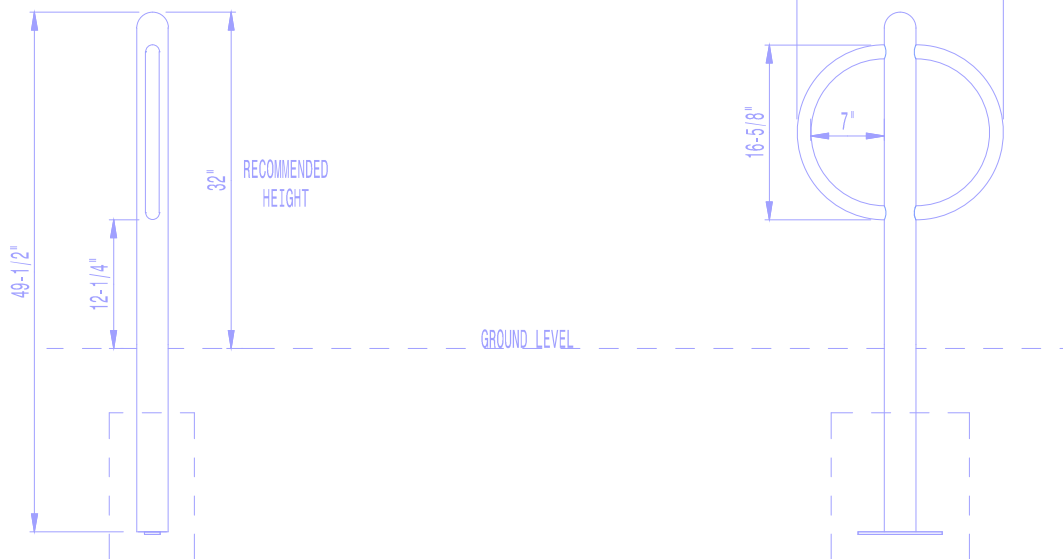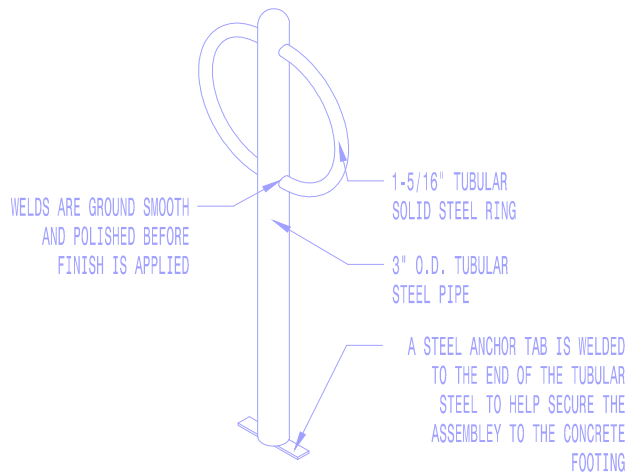

#### AVAILABLE OPTIONS:

##### POWDER COATING


10 AVAILABLE COLORS, 2 OPTIONAL METALLIC  
CUSTOM COLORS (INCLUDING THE RAL RANGE AT AN ADDITIONAL COST)  
(ALL POWDER COAT FINISHES ARE DONE AT VICTOR STANLEY, INC. (VSI) TO MATCH THE VSI PRODUCT LINE)  
OTHER FINISHES: GALVANIZED (SPECIAL QUOTE NEEDED)

#### MOUNTING

STANDARD IN-GROUND (AS SHOWN) AND SURFACE

#### NOTES:

1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PREHEATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGES 8-10 MILS (200-250 MICRONS).
3. THIS SECURE SITE DESIGN, LLC. PRODUCT MUST BE PERMANENTLY AFFIXED IN THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
5. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.



**BRBS-103**

CYCLE SENTRY™ SERIES

BIKE RACK  
SHOWN: STANDARD IN-GROUND MOUNT






**VICTOR STANLEY, INC.®**

-Manufacturers of Quality Site Furnishings since 1962-

\* ALL DIMENSIONS ARE IN INCHES \*

P.O. DRAWER 330 - DUNKIRK, MD 20754 USA  
TOLL FREE: (800) 368-2573 (USA & CANADA)  
TEL (301) 855-8300 - FAX (410) 257-7579  
WEB SITE: HTTP://WWW.VICTORSTANLEY.COM

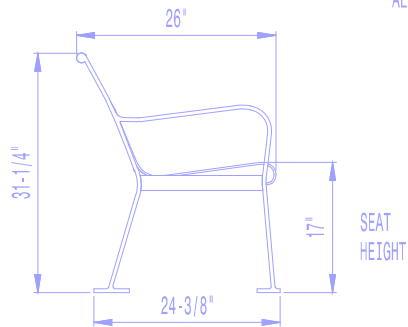

FRONT WELDS ARE POLISHED UNTIL  
THEY DISAPPEAR, FORMING A  
CONTINUOUS SURFACE

STEEL SLATS ARE FORMED FROM  
1/4" x 1-1/2" SOLID STEEL BARS


CLEARANCE FOR 1/2"  
ANCHOR BOLTS

FINISHED END UNIT IS  
MADE FROM 1/2" x 2"  
SOLID STEEL BAR

1-5/16" TUBULAR STEEL  
USED FOR ADDITIONAL SUPPORT

3/8" x 1" SOLID STEEL BARS  
ARE WELDED UNDERNEATH  
FOR ADDITIONAL SUPPORT

FINISHED END UNITS JOIN TO  
SEATING SECTION WITH FASTENERS  
(PLEASE SEE ASSEMBLY DETAIL)

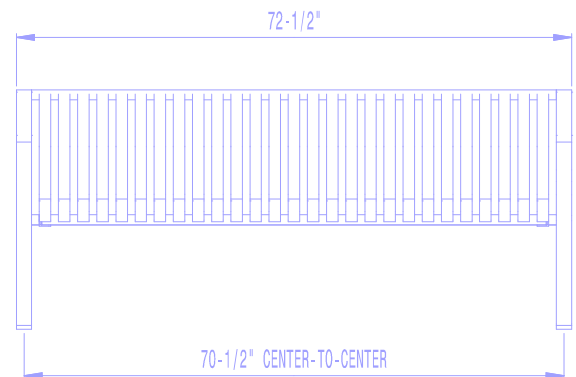

#### AVAILABLE OPTIONS

##### POWDER COATING

10 STANDARD COLORS, 2 OPTIONAL METALLIC COLORS,  
CUSTOM COLORS (INCLUDING THE RAL RANGE)

##### INTERMEDIATE & CENTER ARMRESTS

4', 6', & 8' AVAILABLE WITH OPTIONAL SOLID STEEL ARMRESTS

#### LENGTHS


STANDARD 4'

STANDARD 6' LENGTH SHOWN

STANDARD 8'

#### NOTES:

1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGES 8-10 MILS (200-250 MICRONS).
3. IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL BENCH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
5. FOR HIGH SALT ABUSIVE CLIMATES, HOT DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
6. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
7. THIS PRODUCT IS SHIPPED PARTIALLY UNASSEMBLED.




**RB-28**

STEELSITES™ RB SERIES

ALL STEEL CONTOURED BENCH  
SHOWN: STANDARD 6-FOOT LENGTH

#### ASSEMBLY DETAIL

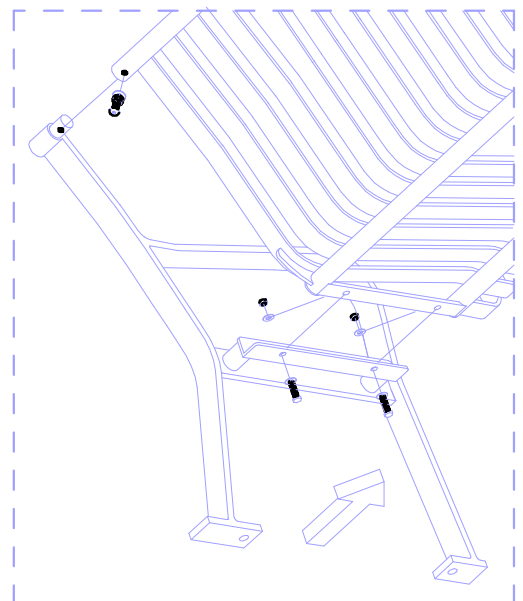




**VICTOR STANLEY, INC.®**

*-Manufacturers of Quality Site Furnishings since 1962-*

\* ALL DIMENSIONS ARE IN INCHES \*

P.O. DRAWER 330 - DUNKIRK, MD 20754 USA  
TOLL FREE: (800) 368-2573 (USA & CANADA)  
TEL (301) 855-8300 - FAX (410) 257-7579  
WEB SITE: [HTTP://WWW.VICTORSTANLEY.COM](http://www.victorstanley.com)

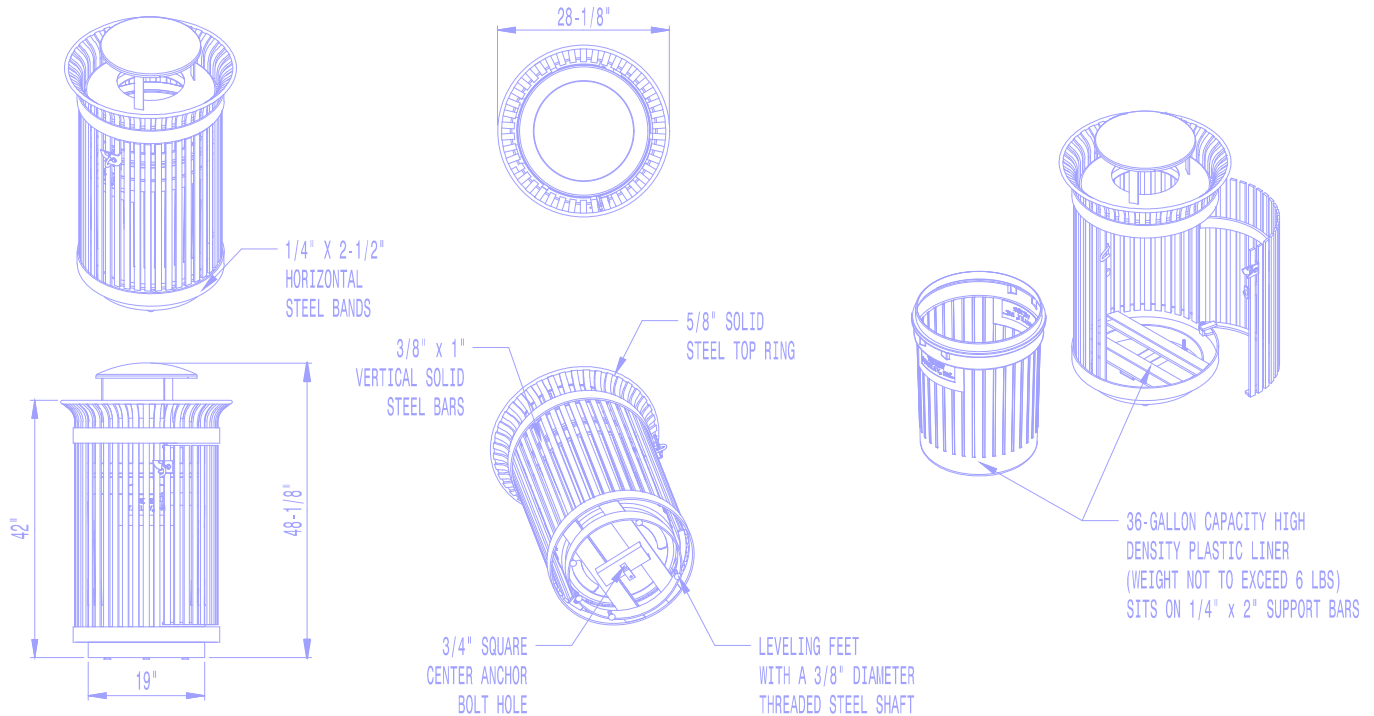

#### AVAILABLE OPTIONS POWDER COATING

10 STANDARD COLORS, 2 OPTIONAL METALLIC COLORS,  
CUSTOM COLORS (INCLUDING THE RAL RANGE.)

#### CUSTOM PLAQUES & DECALS

AVAILABLE WITH STEEL PLAQUES IN VARIOUS SIZES AND PRESSURE SENSITIVE  
VINYL OUTDOOR DECALS.

#### LIDS


STANDARD TAPERED FORMED LID. AVAILABLE WITH OPTIONAL  
DOME LID, DOME LID WITH STAINLESS STEEL ASHTRAY, CONVEX LID,  
CONVEX LID WITH SELF-CLOSING DOOR, RAIN BONNET LID (AS SHOWN), RAIN BONNET LID WITH  
STAINLESS STEEL ASHTRAY, AND RECYCLE LIDS. ASHTRAYS AVAILABLE WITH  
OPTIONAL ASHTRAY COVER.

#### SECURITY

SHOWN WITH STANDARD LOCKABLE LATCH AVAILABLE WITH OPTIONAL KEYED  
LOCK BOX. LID BOLTED IN PLACE. AVAILABLE WITH OPTIONAL MOUNT WITH  
3 IN-LINE ANCHOR HOLES AND OPTIONAL BOTTOM PLATE COVER.

#### NOTES:

1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD FILM COATING. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGES 8-10 MILS (200-250 MICRONS).
3. OIL IMPREGNATED BRONZE BUSHINGS AND STAINLESS STEEL PIVOT PINS FOR DOOR MOVEMENT, STANDARD 3/16" SOLID STEEL LATCH ASSEMBLY OR OPTIONAL PATENTED STAINLESS STEEL KEYED LOCK ASSEMBLY.
4. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
5. VICTOR STANLEY, INC., PLASTIC INNER LINERS ARE MOLDED ON TOOLING DESIGNED FOR AND OWNED BY VICTOR STANLEY, INC. THEY OFFER MAXIMUM CAPACITY AND STRENGTH WITH LIGHTWEIGHT CONSTRUCTION USING CRITICAL MOLDED RIBS, INTEGRAL HANDHOLDS, AND HIGH-STRENGTH MATERIALS. THIS MINIMIZES HANDLING DIFFICULTY AND FACILITATES EASY EMPTYING AND STORAGE WHILE AFFORDING LONG SERVICE LIFE.
6. ANCHOR BOLT NOT PROVIDED BY VICTOR STANLEY, INC.
7. FOR HIGH SALT ABUSIVE CLIMATES, HOT-DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. HOT-DIP GALVANIZING IS PERFORMED FOR VICTOR STANLEY, INC. BY AN EXPERIENCED QUALIFIED FIRM TO WHICH PRODUCTS ARE SHIPPED FOR GALVANIZING. HOT-DIP GALVANIZING INCLUDES AN AGGRESSIVE PRE-TREATMENT AND IMMERSION IN A TANK OF CHARGED LIQUID ZINC AT OR AROUND 860°F (460°C). THE RESULTING SURFACE IS RESISTANT TO RUST BUT HAS SOME UNEVENNESS RESULTING FROM THE BONDING OF THE ZINC TO THE STEEL SURFACE. AS A RESULT, THE POWDER-COATING SURFACE FINISH OVER THAT GALVANIZED SURFACE MAY EXHIBIT BUMPS, UNEVENNESS, AND MAY NOT BE AS SMOOTH AS THE STANDARD FINISH; THIS UNEVEN AND INCONSISTENT FINISH IS NORMAL FOR GALVANIZING. CONTACT MANUFACTURER FOR DETAILS.
8. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
9. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.



**SD-42**

IRONSITES® SERIES

36-GALLON SIDE-DOOR-OPENING LITTER RECEPTACLE  
SHOWN: OPTIONAL RAIN BONNET LID





**IMPALA BLACK GRANITE**  
**POLISHED FINISH**  
(other side)

The North Carolina Granite Corp.  
The Home of Dimensional Stone®  
800.227.6242  
[www.ncgranite.com](http://www.ncgranite.com)

This sample represents the color & texture as closely as possible  
Being a natural product, it may not be uniform throughout.